Crestron Flex Advanced Video Conference System Integrator Kit with a Wall Mounted Control Interface and Lenovo® M920Q ThinkSmart™ Edition Tiny for Microsoft Teams® Rooms



- Conferencing integration solution for Microsoft Teams® Rooms software
- Present, call, conference, and collaborate using your own device's UC conference platform (BYOD) or the native Microsoft Teams® Rooms platform
- Native Microsoft Teams® Rooms touch screen UI provides a consistent, simple user experience with one-touch meeting joins
- Complete kit contains a 10.1 in. wall mount touch screen, a UC presentation transmitter, and UC bracket assembly
- Optional integration with Crestron® control systems
- Direct connection option between UC Engine and wall mount touch screen for simple installation and configuration
- Network management and provisioning, system alerts, and wall mount touch screen pairing to the system's UC Engine through the XiO Cloud® service
- Premium-level support with Crestron Flex Care (optional)
- Enterprise-grade security connects and communicates securely over any enterprise or SMB network
- Supports single or dual video displays (not included)

The UC-CX100-T-L-WM Crestron Flex integrator kit provides a customizable video conference solution for use with Microsoft Teams® Rooms software. It supports single or dual video displays¹ (not included) and features a UC presentation transmitter, a wall mount touch screen and a UC bracket assembly.

Native Microsoft Teams® Rooms Experience

The UC-CX100-T-L-WM system brings the full Microsoft Teams Rooms UC experience to any meeting space in an enterprise or SMB facility, whether implementing a cloud based Microsoft Teams Rooms deployment, on-premises Skype® for Business software, or a hybrid of the two.

Custom Room Integration

The UC-CX100-T-L-WM system provides the essential components needed to design a fully custom video conferencing space using your choice of display devices, cameras, speakers, microphones, and other AV equipment. Any Microsoft Teams software compliant USB camera and USB audio conferencing interface (or speakerphone) may be used.

Intuitive User Interface

With a large 10.1 in. (257 mm) capacitive touch screen display, the Crestron® wall mount touch screen (TSW-1070) provides superior conferencing control in meeting rooms, huddle spaces, and executive offices. The touch screen also offers optional control of room lighting, shades, thermostats, and other equipment.²

Simplified Deployment

The UC Bracket Assembly provides preassembled components on one ready-to-mount bracket to simplify installation. The assembly can be mounted on a wall, or it can be attached to the rear of the display device. Crestron's direct connection method further simplifies installation with a single connection from the wall mount touch screen to the UC Bracket Assembly.³

Wall Mount Options

Using the bracket provided, the touch screen is easily installed over a 2-gang or 3-gang US electrical box, or a 2-gang European or UK electrical box. A security latch option is included to deter unauthorized removal of the touch screen.

Crestron Control System Integration

The UC-CX100-T-L-WM integrates with a Crestron control system to enable touch screen control of room lighting, motorized window shades, climate control, AV, and other amenities.²

Bring Your Own Device (BYOD)

Conference room visitors can connect their laptop to the Crestron Flex system to use their own UC conference platform. The UC Presentation Transmitter (UC-PR) switches



Crestron Flex Advanced Video Conference System Integrator Kit with a Wall Mounted Control Interface and Lenovo® M920Q ThinkSmart™ Edition Tiny for Microsoft Teams® Rooms

to the connected laptop's UC platform and returns to the native platform when disconnected.⁴ For a list of BYOD tested devices on the UC-PR, refer to OLH Article 1000889.

Enterprise-Grade Security

Crestron Flex is an enterprise-grade solution, engineered in partnership with Microsoft to integrate seamlessly into any Microsoft Teams Rooms or Skype® for Business software deployment. Crestron Flex is ideally equipped for mass deployment throughout any sized corporate, university, medical, military, or government facility.

Easy Provisioning and Device Management

The XiO Cloud service is an IoT cloud based provisioning service (available separately) that enables installers and IT managers to easily deploy and manage thousands of devices. The XiO Cloud service provides system alerts, network management and provisioning, and the pairing of a control device to the system's UC Engine. System updates are controlled by Windows® software update.

Visit www.crestron.com/xiocloud for additional information.

Premium-Level Support

Crestron Flex Care is an optional subscription service that automatically renews annually, providing 24/7 live remote technical support, an extended five year warranty on Crestron® hardware, expedited advance replacements, and a discounted rate for on-site support.

Visit www.crestron.com/flexcare for additional information.

Dual Control Option

A TS- or TSW- 70 series 10.1 in. touch screen may be added to the solution as an additional control point for the Microsoft Teams Rooms environment.^{2, 3}

Deployment Resources

View the <u>Crestron Flex Pre-Deployment Checklist</u> to help plan your Crestron Flex installation.

Specifications

Included Components

<u>TSW-1070-B-S-T-V</u> 10.1 in.

10.1 in. (257 mm) wall mount touch screen, black

UC-BRKT-260-P-T-L-ASSY UC Bracket Assembly comprised of:

 UC Engine: Lenovo® M920Q ThinkSmart™ Edition Tiny with Microsoft Teams video

 ADPT-USB-ENET: USBto-Ethernet Adapter

 HD-CONV-USB-260: HDMI® over CAT5 to USB 3.0 converter for content ingest

• Mounting hardware

UC-PR UC Presentation Transmitter

CBL-4K-DP-HD-6 DisplayPort™ to HDMI Cable,

6 ft (1.8 m)

CBL-CAT5E-7 (2) Ethernet LAN cable for UC

Engine, RJ-45-to-RJ-45, black,

7 ft (2.1 m)

CBL-HD-6 HDMI Interface Cable, 6 ft

(1.8 m)

DM-CBL-ULTRA-PC-20 (2) Ethernet LAN cable,

CAT6a, RJ-45-to-RJ-45, blue, 20 ft (6.1 m)

2010(0

Wall Mount Touch Screen

Touch Screen 10.1 in. (257 mm) diagonal capacitive multi-

touch TFT active matrix color LCD, 1920 x

1200 pixels

UI Microsoft Teams UI plus optional Crestron

Smart Graphics® room control UI²

Ethernet 100 Mbps, auto switching, auto negotiating,

auto discovery, full/half duplex, TCP/IP, UDP/IP, CIP, DHCP, SSL, TLS, SSH, SFTP (SSH File Transfer Protocol), IEEE 802.1X, SNMP, IPv4 or IPv6, Active Directory® service authentication, HTTPS web browser setup, XiO Cloud® client, IEEE 802.3at compliant



Crestron Flex Advanced Video Conference System Integrator Kit with a Wall Mounted Control Interface and Lenovo® M920Q ThinkSmart™ Edition Tiny for Microsoft Teams® Rooms

IEEE 802.3at Type 2 compliant PoE+ PD Power over

Ethernet (Powered Device);

Normally requests 15 W from an 802.3at Type 2 PSE with LLDP advanced power

management;

With room scheduling and USB enabled, requests 18 W from an 802.3at Type 2 PSE

with LLDP;

Requests 30 W (PoE+ Class 4) from an 802.3at Type 2 PSE without LLDP; Requests 15.4 W (PoE Class 0) from an

802.3af (or 802.3at Type 1) PSE

Power Powered via PoE passthrough on the UC-PR

Construction Plastic, smooth black finish, edge-to-edge

glass with black surround

Dimensions Height: 5.87 in. (149 mm)

> Width: 9.46 in. (240 mm) Depth: 2.01 in. (51 mm)

Dimensions do not include mounting bracket

or add-on accessories

Weight 1.61 lb (730 g)

UC Bracket Assembly

Lenovo M920Q ThinkSmart Edition Tiny, **UC Engine**

Intel Core® processor with Windows® 10 IoT Edition OS and 100/1000 Mbps Ethernet

connectivity

UC Client Microsoft Teams Rooms with Skype® for

Business software functionality

Management

Client

XiO Cloud Service

Content Ingest HDMI input via CAT5 to USB 3.0 converter

(model HD-CONV-USB-260)

Display Output Single or dual display support¹

Display Output 1080p

Resolution

UC Engine: 135 W via external 100-240VAC, Power

50/60 Hz adapter (included);

HD-CONV-USB-260: 24VDC via external 100-240VAC, 50/60 Hz power pack

(included)

Construction Metal mounting bracket, black,

preassembled with UC Engine and CAT5 to

USB 3.0 content ingest device

(HD-CONV-USB-260)

Mounting Surface wall mount behind the display

> device, or attach to the rear of the display device via the bolts attaching the display to

> a VESA® compliant display mount; Bracket includes mounting holes on both side edges, spaced 100, 200, and 300 mm vertically, to allow for attachment to either

HDMI, DisplayPort 1.2 via USB-C® port

side of the display mounting plate

Dimensions Height: 15.00 in. (381 mm)

> Width: 14.50 in. (368 mm) Depth: 1.90 in. (48 mm)

6.64 lb (3 kg) Weight

UC Presentation Transmitter (UC-PR)4

Video Input Signal

Types

HDMI over CAT5

Video Output Signal Types

Resolution 1080p

Video Content HDCP 1.4 and HDCP 2.2

Protection

Audio Input Signal HDMI, DisplayPort 1.2 via USB-C port

Types

Audio Output

Signal Types

Communications Ethernet: 100 Mbps, auto-switching,

HDMI over CAT5

auto negotiating, auto-discovery HDMI over CAT5: HDCP, Ethernet

HDMI: HDCP

USB: USB 2.0 and USB 3.0

LAN PoE: (1) 8-pin RJ-45 connector; Connectors

ACC: (1) USB 3.0 Type B connector;

For firmware loading only;

USB A: (1) USB 2.0 Type A connector; USB B: (1) USB 2.0 Type B connector; USB: (1) USB 2.0 Type-C connector;

HDMI IN: (1) HDMI Type A; To RX: (1) 8-pin RJ-45 connector; Power Jack: (1) DC power connector; LAN: (1) 8-pin RJ-45 connector;

Ground: (1) 6-32 screw

PWR: (1) Green LED, indicates operating Indicators

> power supplied via power supply Ethernet: (2) LEDs on To RX port; Green indicates Ethernet link status; Amber indicates Ethernet activity

Power Supply 24VDC, 6A, 100-240VAC

Up to 60 W charging for devices **Device Charging**

connected via USB-C port

Crestron Flex Advanced Video Conference System Integrator Kit with a Wall Mounted Control Interface and Lenovo® M920Q ThinkSmart™ Edition Tiny for Microsoft Teams® Rooms

Construction Metal, black finish, integral mounting

flanges;

Vented top, front, bottom, and sides

Mounting Surface mount for mounting under

table;

Attaches to a single rack rail

Dimensions Height: 1.58 in. (40 mm)

Width: 9.25 in. (235 mm) Depth: 8.20 in. (208 mm)

Model

UC-CX100-T-L-WM

Crestron Flex Advanced Video Conference System Integrator Kit with a Wall Mounted Control Interface and Lenovo® M920Q ThinkSmart™ Edition Tiny for Microsoft Teams® Rooms

Available Accessories

For a list of available accessories, visit the $\underline{\text{UC-CX100-T-L-WM}}$ product page.

Notes:

- Display must support "Wake on Sync" and "Sleep on No Sync" functionality. Consult the display manufacturer's specifications or internal settings of the specific display.
- Room control capability (lighting, shades, thermostats, etc.) requires
 additional equipment and commissioning to be provided by a Crestron
 authorized integrator and/or programmer. Additional costs may apply.
- 3. Only one control device may be connected via direct connection method.
- 4. The UC-PR uses a USB-C 2.0 connection to provide content sharing, BYOD support, and charging for a user's device. Because USB-C supports multiple functions, device compatibility often varies. While some devices can accept power and data through the same USB-C connection, others cannot. The USB-C port on the UC-PR (labelled "USB") uses DisplayPort alternate mode for transporting video signals. Consult the connected device's user manual or manufacturer to ensure that the device supports DisplayPort alternate mode. Some devices that support DisplayPort alternate mode may not support device charging. For a list of tested devices, refer to OLH Article 1000889. USB-C transfer speeds may vary based on the connected device's processing speed, system configuration, the operating environment, and/or other factors. If the user's device does not support USB-C, then a combination of HDMI and USB B may be used for content sharing or BYOD functionality as described in the UC-CX100-T-L-WM Quick Start guide (Doc. 8949).

This product may be purchased from select authorized Crestron dealers and distributors. To find a dealer or distributor, please contact the Crestron sales representative for your area. A list of sales representatives is available online at www.crestron.com/How-To-Buy/Find-a-Representative or by calling 855-263-8754.

This product is covered under the Crestron standard limited warranty. Refer to www.crestron.com/warranty for full details.

The specific patents that cover Crestron products are listed online at patents.crestron.com.

Certain Crestron products contain open source software. For specific information, please visit www.crestron.com/opensource.

Crestron, the Crestron logo, Smart Graphics, and XiO Cloud are either trademarks or registered trademarks of Crestron Electronics. Inc. in the United States and/or other countries. HDMI is either a trademark or registered trademark of HDMI Licensing LLC in the United States and/or other countries. Intel Core is either a trademark or registered trademark of Intel Corporation in the United States and/or other countries. Lenovo and ThinkSmart are either trademarks or registered trademarks of Lenovo in the United States and/or other countries. Active Directory, Microsoft Teams, Skype, and Windows are either trademarks or registered trademarks of Microsoft Corporation in the United States and/or other countries. USB-C is either a trademark or registered trademark of USB Implementers Forum, Inc. in the United States and/or other countries. DisplayPort and VESA are either trademarks or registered trademarks of Video Electronics Standards Association in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography.


Specifications are subject to change without notice.


©2021 Crestron Electronics, Inc.


Rev 05/28/21




Crestron Flex Advanced Video Conference System Integrator Kit with a Wall Mounted Control Interface and Lenovo® M920Q ThinkSmart™ Edition Tiny for Microsoft Teams® Rooms



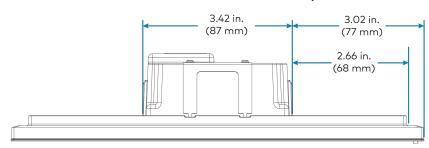


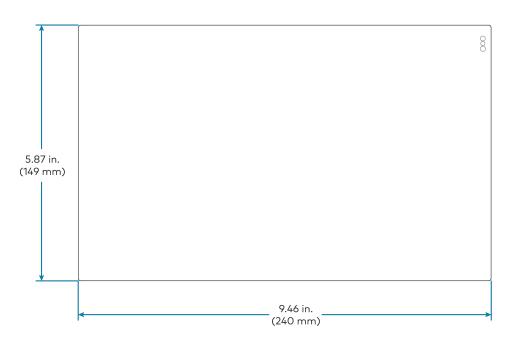

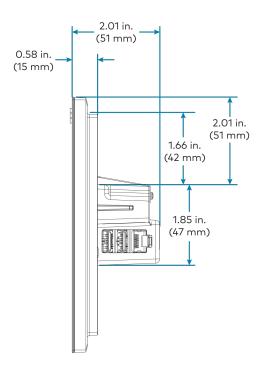


Crestron Flex Advanced Video Conference System Integrator Kit with a Wall Mounted Control Interface and Lenovo® M920Q ThinkSmart™ Edition Tiny for Microsoft Teams® Rooms

TSW-1070 Mounting Bracket

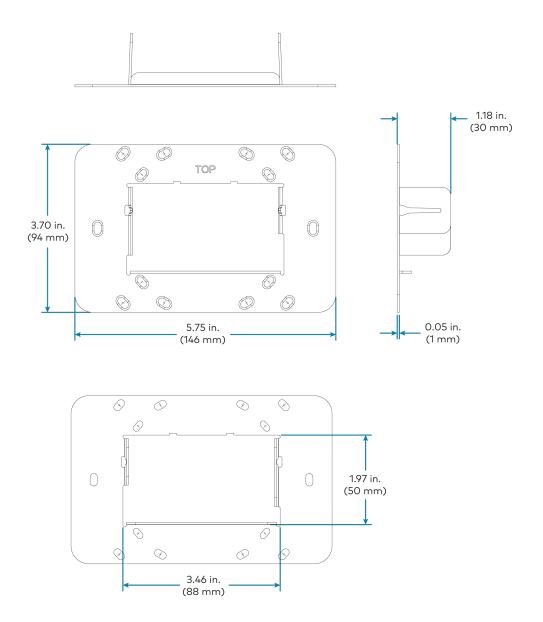

Crestron Flex Advanced Video Conference System Integrator Kit with a Wall Mounted Control Interface and Lenovo® M920Q ThinkSmart™ Edition Tiny for Microsoft Teams® Rooms

UC Bracket Assembly (UC-BRKT-260-P-T-L-ASSY)

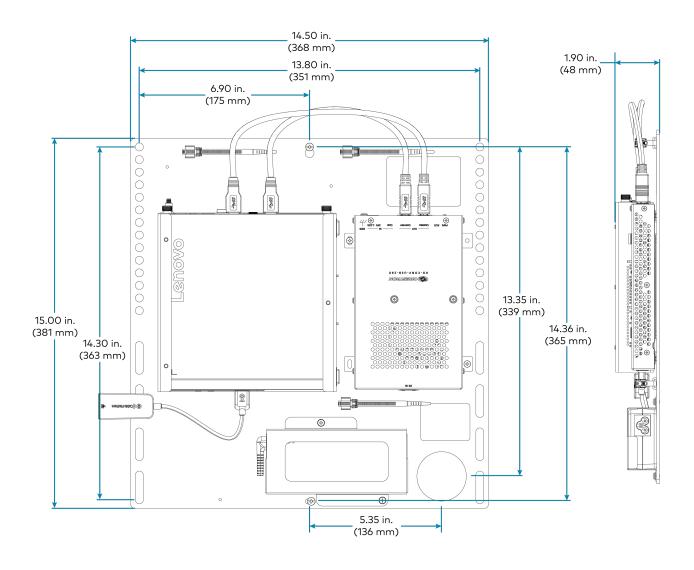



Crestron Flex Advanced Video Conference System Integrator Kit with a Wall Mounted Control Interface and Lenovo® M920Q ThinkSmart™ Edition Tiny for Microsoft Teams® Rooms

UC Presentation Transmitter (UC-PR)

