

Crestron **Adagio**® **ATC-AMFMSRD**
AM/FM and SIRIUS® Satellite Radio
Tuner Card with Digital Output

Operations & Installation Guide



This document was prepared and written by the Technical Documentation department at:



Crestron Electronics, Inc.
15 Volvo Drive
Rockleigh, NJ 07647
1-888-CRESTRON

Introducing SIRIUS Satellite Radio

Over 130 channels of the best entertainment and completely commercial-free music for your car, home or office.

Only SIRIUS has more than 69 original music channels, from today's hits to R&B oldies to classical masterpieces. From authentic country and real bluegrass to cool jazz, hot Latin, reggae, rock and many more. Best of all, it is all completely commercial-free.

SIRIUS also has more than 60 channels of world-class sports, news and entertainment. Included as part of your subscription, you get up to 16 NFL games a week, up to 40 NBA games a week and up to 40 NHL games a week. (Games are broadcast during their respective seasons.) Coupled with great sports news from ESPN, the SIRIUS sports offering is unrivaled. And do not forget a host of other great news and entertainment like NPR, CNBC, Fox News, Radio Disney and E! Entertainment Radio. For more information, visit www.sirius.com.

Activating your SIRIUS Subscription

You must activate your SIRIUS tuner before you can begin to receive the SIRIUS Satellite Radio service.

In order to activate your radio subscription, you will need the SIRIUS ID (SID) which uniquely identifies your tuner. The SID may be found on a sticker located on the ATC-AMFMSRD card or by selecting channel 0 on the radio, in which case the SID will appear on your Adagio[®] system or CEN-TRACK screen. Note channel 0 has no audio content.

A tuner that has not been activated will automatically tune to the SIRIUS preview channel.

Contact SIRIUS on the Internet:

<https://activate.siriusradio.com/>

Follow the prompts to activate your subscription or you can also call SIRIUS toll-free at:

1-888-539-SIRIUS (1-888-539-7474)

Once the subscription process is completed, your tuner is ready to use.

Contents

AM/FM and SIRIUS Satellite Radio Tuner Card with Digital Output: Adagio® ATC-AMFMSRD	1
Introduction	1
Features and Functions	1
Specifications	2
Physical Description	3
Industry Compliance	5
Setup	6
Installation	6
Regional Configuration	7
Hardware Hookup	8
Antenna Orientation	8
Uploading and Upgrading	11
Establishing Communication	11
Firmware	11
Operation	12
Problem Solving	13
Troubleshooting	13
Reference Documents	13
Further Inquiries	14
Future Updates	14
Appendix: RBDS/RDS Function Support	15
Return and Warranty Policies	17
Merchandise Returns / Repair Service	17
CRESTRON Limited Warranty	17

AM/FM and SIRIUS Satellite Radio Tuner Card with Digital Output: Adagio® ATC-AMFMSRD

Introduction

The ATC-AMFMSRD tuner card is designed for use with the Crestron® CEN-TRACK Tuner Rack multi-tuner. On a single card, the ATC-AMFMSRD provides one AM/FM tuner and one SIRIUS Satellite Radio tuner. Each tuner may be operated independently and simultaneously.

In addition to its two analog audio output signals, the ATC-AMFMSRD also supports digital output from the satellite radio tuner portion, making it ideal for use with the CEN-TRACK. It can also be used with any Adagio® system that features tuner card slots. Except where noted, references to Adagio systems will be used to describe both Adagio systems featuring tuner card slots and the CEN-TRACK.

Features and Functions

- AM/FM/SR Tuner Card slides easily into place to become an integral part of its control system
- Independent AM/FM/SIRIUS Satellite Radio tuners on a single plug-in card
- Tuners are ready for routing to additional rooms on attached Adagio® Audio Expanders (AAE)
- Adagio® system front panels and other supported user interfaces control the tuners with out-of-the-box functionality (Does not pertain to CEN-TRACK).
- Full control of each tuner is available through the CEN-TRACK LCD front panel, and from Crestron touchpanels.
- RBDS/RDS compatible*

* The Radio Broadcast Data System (RBDS), a North American standard and Radio Data System (RDS), a European standard, permit broadcasters to use a sub-carrier frequency to transmit inaudible digital data along with their regular FM programming to receivers equipped to process the data. Refer to "Appendix: RBDS/RDS Function Support" on page 15 for more information.

Specifications

Specifications for the ATC-AMFMSRD are listed in the following table.


ATC-AMFMSRD Specifications

SPECIFICATION	DETAILS
Audio	
Maximum Output	1 V _{rms} @ 1 kHz (AM/FM); 2 V _{rms} (SIRIUS)
FM Tuner	
Frequency Range	87.50 to 108 MHz (50 or 100 kHz steps)
Intermediate Frequency	10.7 MHz
Usable Sensitivity	11 dBf mono
S/N Ratio	64 dB @ 65 dBf mono; 60 dB @ 65 dBf stereo
IF Rejection	100 dB
AM Rejection	55 dB
Stereo Separation	40 dB
AM Tuner	
Frequency Range	530 to 1710 kHz (10 kHz steps)
Sensitivity	3.5 μV (RF input level 10dB S+N/N)
Selectivity	10 kHz
Up/Dn Freq Increments (US)	10 kHz
Up/Dn Freq Increments (Europe)	9 kHz
Alternate Channel Selectivity	55 dB
Image Rejection	35 dB
IF Rejection	60 dB
Power Requirements	24 VDC provided from backplane at 400 mA max. (estimated 9.6 Watts)
Environmental	
Temperature	32° to 140°F (0° to 60°C)
Humidity	10% to 90% RH (non-condensing)
Dimensions	
Height	1.39 in (3.51 cm)
Width	4.91 in (12.46 cm)
Depth	6.69 in (16.98 cm)

Physical Description

This section provides information on the connections, controls and indicators available on your ATC-AMFMSRD.

ATC-AMFMSRD Physical View (Head On)

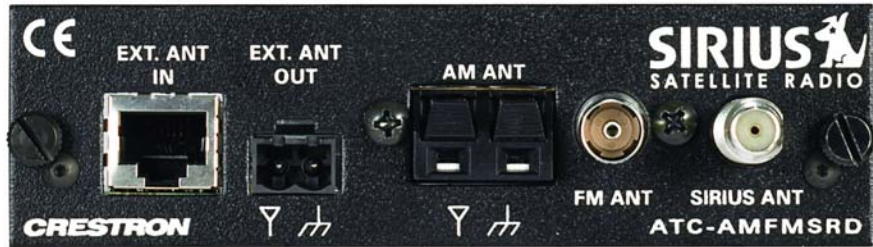

ATC-AMFMSRD Physical View (Angled)






Conversion Connector Coax (RG6)/F Type (Antenna) to IEC Type Connector (Tuner)



Conversion Connector Coax (RG6)/F Type (Tuner) to SMB Type Connector (Antenna)



ATC-AMFMSRD Overall Dimensions

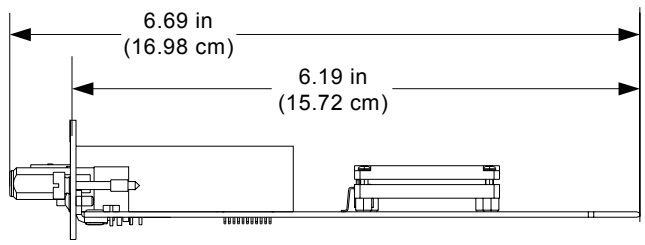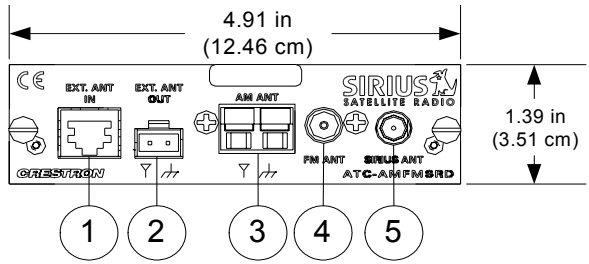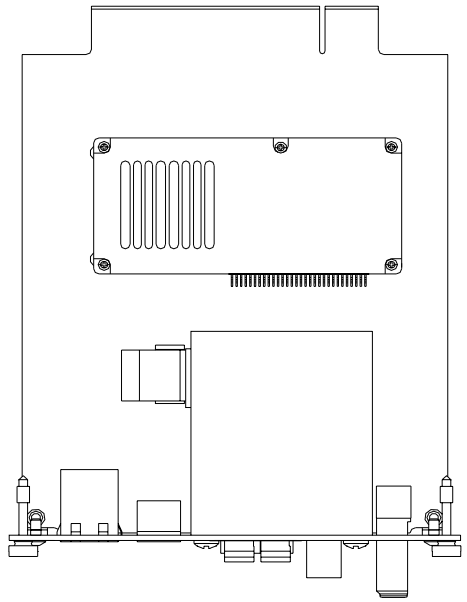

Connectors, Controls & Indicators

#	CONNECTORS, CONTROLS & INDICATORS	DESCRIPTION
1	EXTERNAL AM ANTENNA IN	(1) 8-wire RJ-45 female; Reserved for future remote AM antenna (not yet available).
2	EXTERNAL AM ANTENNA OUT	(1) 2-pin detachable terminal block; AM antenna signal pass-through from remote antenna.
3	AM ANTENNA	(1) 2-pin spring-loaded terminal; AM shielded loop antenna included; Impedance: 50 Ω.
4	FM ANTENNA	(1) IEC 169-2 coaxial (IEC to F adapter included); FM wire antenna included; Impedance: 75 Ω.
5	SIRIUS ANTENNA	(1) F-type coaxial (F to SMB adapter included); Indoor/outdoor high-gain antenna included; Impedance: 75 Ω.

Industry Compliance

As of the date of manufacture the ATC-AMFMSRD has been tested and found to comply with specifications for CE marking and standards per EMC and Radiocommunications Compliance Labelling.



NOTE: This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
 - Increase the separation between the equipment and receiver.
 - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 - Consult the dealer or an experienced radio/TV technician for help.
-

Setup

This section contains hardware installation and setup instructions for the ATC-AMFMSRD.

Required Tools/Hardware

1. Small flat bladed screwdriver
2. Grounding strap (encouraged)

Installation

CAUTION: The ATC-AMFMSRD and the Adagio® systems contain electrostatic discharge (ESD) sensitive devices. Crestron encourages you to wear a grounding strap to avoid damaging the card and/or the host system.

When inserting a card into an Adagio system you may need to move other source connections if designated connectors are occupied by other sources. For programming purposes, slots and source connections are matched according to the following table:

	Slot 1	Slot 2	Slot 3
Source Connections	1&2	3&4	Refer to note below.

CAUTION: Do not connect external sources to SOURCES connectors used by tuner cards.

CAUTION: Be certain to insert tuner card before applying power to the Adagio system.

NOTE: If the user intends to use the out-of-the-box functionality, do not to use **SLOT 3** for tuner cards; otherwise, **SLOT 3** uses source connections 5 and 6. Does not pertain to the CEN-TRACK.

Begin the card insertion procedure with these steps:

1. Disconnect power from the Adagio system.
2. Remove the slotted screws securing any cover plate that may be fastened the slot you intend to use. Set the screws and the cover plate aside.
3. Unpack the ATC-AMFMSRD card.
4. As shown in the photo following this step, position the ATC-AMFMSRD card so the print on the faceplate is right side up and the side rails of the card slide into the plastic slots mounted on the left and right inside walls of the Adagio system.

ATC-AMFMSRD Installation

5. Push the ATC-AMFMSRD card into the slot until it stops at the rear connector, then push again until the ATC-AMFMSRD card snaps into place.
6. Secure the card in place by tightening the two slotted screws by hand. The screwdriver slots are provided for removal only.
7. Connect antenna(s).
8. Apply power to the Adagio system.


Regional Configuration

Once the tuner card is installed, users may change the AM/FM tuner configuration for North American and European signal reception. For instructions on changing the regional configurations refer to the latest revision of the Crestron CEN-TRACK Operations Guide (Doc. 6646) or the operations guide for your particular Adagio system that feature tuner card slots which can be obtained from the Crestron website (<http://www.crestron.com/manuals>).

Hardware Hookup


Make the necessary connections as called out in the following illustration.

Hardware Connections for the ATC-AMFMSRD

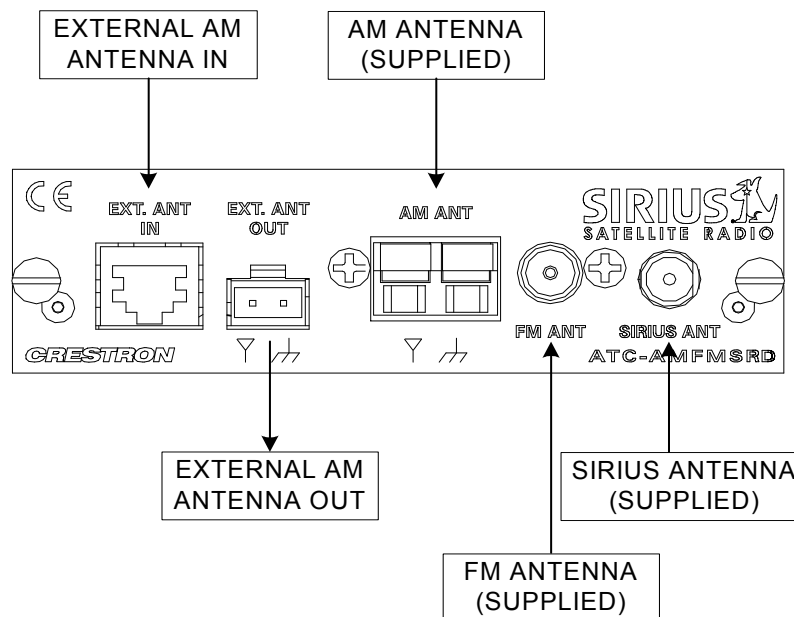

The supplied AM antenna is connected as shown in the following illustration.

AM Antenna Connection

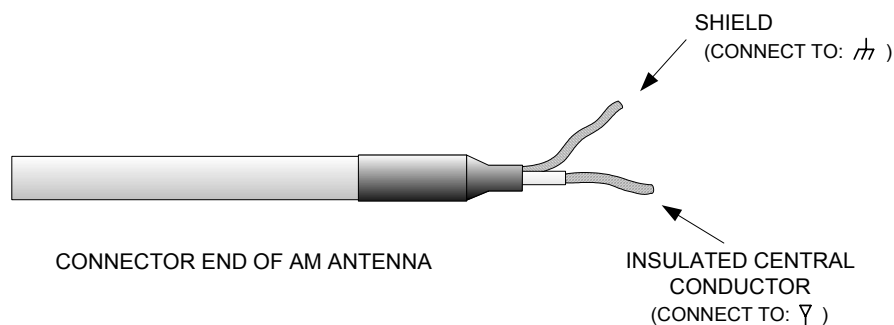

Antenna Orientation

AM

Once your antennas have been connected it may be necessary to orient the AM loop antenna so the flat surface of the loop antenna faces the metropolitan area from which the broadcast signals originate. This is particularly necessary when signals are weak. If you are not aware of the source or direction of the signals to which you will listen, simply rotate the loop antenna in clear space for maximum signal strength. The supplied antenna has a folding stand that allows you to place the antenna on a flat surface.

FM

The recommended FM antenna is an outdoor type commonly available in electronics stores. Use of the supplied indoor FM antenna is recommended only if you cannot use an outdoor antenna. Outdoor antennas are particularly important in rural areas, some distance from FM radio signal sources. The FM wire antenna supplied with


your tuner should be stretched to its full length. Some reorientation may be necessary if signals in your area are weak. Best results can usually be achieved if the length of the antenna faces the metropolitan area from which the FM signals you wish to receive originate. The supplied antenna has a fitting at its end that will enable you to fasten it in place.

SIRIUS

For correct operation and best reception of the SIRIUS signal, it is important that the antenna is located in a place where it will have a clear view of the SIRIUS satellites in the sky. Obstructions such as bushes, trees, other homes or buildings, overhangs, soffits, chimneys, gables, dormers, etc., will impair or prevent the antenna from receiving a signal.

The best reception is obtained if the antenna is located outside and where the pod portion of the antenna (where the SIRIUS logo is printed) has a clear 360 degree view of the sky.

If you cannot obtain a clear 360 degree view of the sky outdoors or you will be locating the antenna indoors, you will need to place the antenna in a window (or outdoor location) which has a clear view of the sky in the direction of the satellites and aim the antenna in the direction of the satellites, as shown in the diagram below.

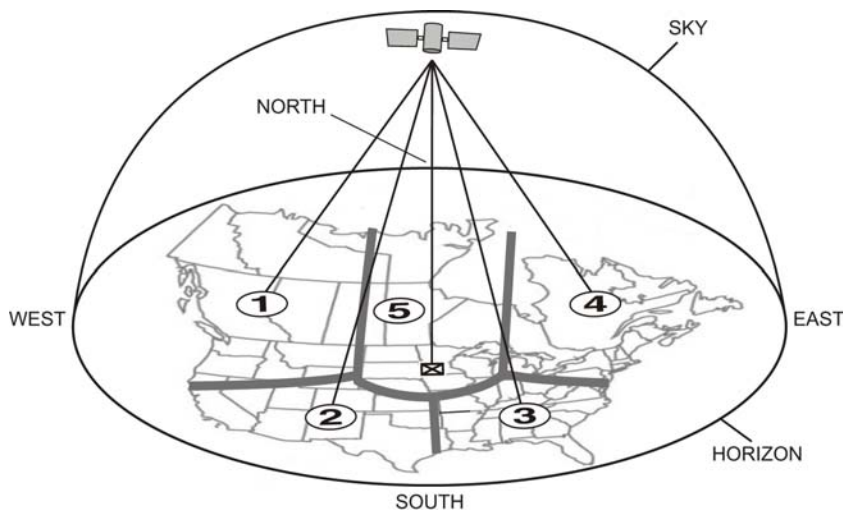

Use the map in the diagram to find the area in which you are located (1 to 5). Then find the direction in which you need to have a window (or outdoor location) with a clear view of the sky:

- Area 1: You will need a window/location with a clear view of the sky facing EAST or NORTHEAST or SOUTHEAST.
- Area 2: You will need a window/ location with a clear view of the sky facing NORTH or NORTHEAST.
- Area 3: You will need a window/ location with a clear view of the sky facing NORTH or NORTHWEST.
- Area 4: You will need a window/ location with a clear view of the sky facing WEST or NORTHWEST or SOUTHWEST.
- Area 5: You will need a window/ location with a clear view of the sky facing STRAIGHT UP (antenna cannot be located indoors).

For example, suppose you live in Area 2. You determined that your antenna will need to have a window (or outdoor location) with a clear view of the sky facing

North or Northeast. The exact direction is determined by your specific location in Area 2 relative to the X on the map; if you live in Texas, you will need a more North facing clear view of the sky whereas if you live in southern California, you will need a more Northeast facing clear view of the sky.

In major US cities, you may be able to receive the SIRIUS signal from the SIRIUS ground repeaters, which would allow you to place the antenna away from a window if the signal is strong enough.

If the tuner has not yet been subscribed, be sure to set the tuner to the preview channel. Refer to the latest version of your Adagio system's operations guide to determine if you are receiving an adequate signal.

When you have installed the antenna in a suitable location, check the signal strength display of your SIRIUS-ready receiver to verify that you are receiving a suitable signal. For instructions on how to access the signal strength display, refer to the latest version of your Adagio system's operations guide. If the signal is weak or the tuner loses reception at times, this is indication that the antenna is not aimed in the optimal direction. Try adjusting the antenna by changing the orientation in small increments to see if you can obtain better signal reception.

The following antennas are supplied with your AM/FM/SR tuner card:

AM Loop Antenna



FM Wire Antenna



SIRIUS Antenna



Uploading and Upgrading

NOTE: Using this tuner card in a system that goes beyond out-of-the-box functionality requires programming. Since the ATC-AMFMSRD is inserted into an Adagio system, refer to the latest version of the operations guide for your particular Adagio system for details.

Crestron recommends using the latest programming software and that each device contains the latest firmware to take advantage of the most recently released features. However, before attempting to upload or upgrade it is necessary to establish communication.

Establishing Communication

Consult the latest version of the operations guide for your particular Adagio system for details.

Firmware

Firmware files may be distributed from programmers to installers or from Crestron to dealers. Firmware upgrades are available from the Crestron website as new features are developed after product releases. For details on upgrading refer to the Crestron Toolbox™ help file.

Check the Crestron website to find the latest firmware. (New users may be required to register to obtain access to certain areas of the site, including the FTP site.)

Upgrade ATC-AMFMSRD firmware via Crestron Toolbox.

- Display the network device tree (**Tools | Network Device Tree**) to show all network devices connected to the control system. Right-click on the ATC-AMFMSR to display actions that can be performed on the ATC-AMFMSRD.

Select **Functions | Firmware** to upgrade the ATC-AMFMSRD firmware.

Operation

Please refer to the latest version of the Crestron CEN-TRACK Operations Guide (Doc. 6646) or the operations guide for your particular Adagio system for control of the AM/FM/SRD tuner card.

Problem Solving

Troubleshooting

The following table provides corrective action for possible trouble situations. If further assistance is required, please contact a Crestron customer service representative.

ATC-AMFMSRD Troubleshooting

TROUBLE	POSSIBLE CAUSE(S)	CORRECTIVE ACTION
Tuner muted.	Mismatched slot.	Place card in proper slot.
	Antenna not connected or not connected properly.	Verify proper antenna connection.
	Mute turned on.	Press the Mute button to disengage muting.
	Station detuned or weak.	Tune station; adjust antenna.
	Unsubscribed SIRIUS tuner not on preview channel.	If unsubscribed, be sure tuner is on preview channel.
	Subscribed SIRIUS tuner not on a subscribed channel.	If subscribed, be sure tuner is on a subscribed channel.
	Adagio system volume is turned down.	Check Adagio system volume setting.
Cannot access tuner card controls from Adagio system front panel.	Dusty contacts.	Clean contacts with cotton swab or clean cloth. Apply Isopropyl alcohol as needed for cleaning.
Noisy AM/FM reception.	Improper antenna connection.	Verify proper antenna connection.
AM/FM scan does not operate.	Station signal strength too weak.	Check antenna placement and orientation for good signal strength.

Reference Documents

The latest version of all documents mentioned within the guide can be obtained from the Crestron website (<http://www.crestron.com/manuals>). This link will provide a list of product manuals arranged in alphabetical order by model number.

List of Related Reference Documents

DOCUMENT TITLE
Adagio AES Entertainment System
Adagio AMS Media System
Adagio AMS-AIP Media System with Advance Image Processing
CEN-TRACK Tuner Rack

Further Inquiries

If you cannot locate specific information or have questions after reviewing this guide, please take advantage of Crestron's award winning customer service team by calling Crestron at 1-888-CRESTRON [1-888-273-7876].

You can also log onto the online help section of the Crestron website (www.crestron.com/onlinehelp) to ask questions about Crestron products. First-time users will need to establish a user account to fully benefit from all available features.

Future Updates

As Crestron improves functions, adds new features and extends the capabilities of the ATC-AMFMSRD, additional information may be made available as manual updates. These updates are solely electronic and serve as intermediary supplements prior to the release of a complete technical documentation revision.

Check the Crestron website periodically for manual update availability and its relevance. Updates are identified as an “Addendum” in the Download column.

Appendix: RBDS/RDS Function Support

Many radio stations transmit additional information such as traffic information, radio text, real time clock etc., with their regular FM programming. The FM tuner contains circuitry that retrieves this information.

The US format for such information is called the Radio Broadcast Data System (RBDS) and in Europe this format is called the Radio Data System (RDS). There are some differences between the US and European standards.

The tables in this appendix describe information included in the standard.

When this feature becomes available and it is accessed by the user the **Display** button will bring to the screen the various tables containing this data.

RBDS/RDS Supported Feature Overview

FEATURES	DESCRIPTION
Program type name (PTY)	There are 31 program types such as jazz, classic etc. Each station that supports RDS will report its program type. (Refer to program type list following this table.)
Program service name (PS)	The station reports its service name such as WIRL, KTU etc.
Program type additional Info (PTYN)	The station will sometimes report additional information about its program type. For example, a program type "Sport" station may report a PTYN of "Football".
Radio text display support (RT)	The station will report radio text information such as phone numbers, artist, song, station name, etc., in this field. This field could be either 32 or 64 characters in length.
Universal real time clock (UTC)	Some stations transmit the universal time clock year, month, day, hour, minute and GMT offset.
Traffic information report (TA/TP)	From stations that support traffic information.
Station search by TA, TP or TA&TP traffic information types	The FM Tuner can search for stations which either broadcast or know about other stations that transmit traffic information. TA = This station has information about other stations that carry traffic announcements. TP = This station broadcasts traffic announcements but none is being broadcasted right now. TA&TP = This station is currently broadcasting the traffic announcements.
Station search by PTY	The FM Tuner is able to search for stations with specified program type.

RBDS/RDS Program Types

PTY CODE	RBDS PROGRAM TYPE (US)	RDS PROGRAM TYPE (EUROPE)
0	No program type or undefined	No program type or undefined
1	News	News
2	Information	Current Affair
3	Sports	Information
4	Talk	Sports
5	Rock	Education
6	Classic Rock	Drama
7	Adult Hits	Culture
8	Soft Rock	Science
9	Top 40	Varied
10	Country	Pop Music
11	Oldies	Rock Music
12	Soft	M.O.R Music
13	Nostalgia	Light classical
14	Jazz	Serious Classic
15	Classical	Other Music
16	Rhythm and Blues	Weather
17	Soft Rhythm and Blues	Finance
18	Language	Children's Program
19	Religious Music	Social Affairs
20	Religious Talk	Religion
21	Personality	Phone In
22	Public	Travel
23	College	Leisure
24	Unassigned	Jazz Music
25	Unassigned	Country Music
26	Unassigned	National Music
27	Unassigned	Oldies Music
28	Unassigned	Folk Music
29	Weather	Documentary
30	Emergency Text	Alarm Test
31	Emergency	Alarm

Return and Warranty Policies

Merchandise Returns / Repair Service

1. No merchandise may be returned for credit, exchange or service without prior authorization from CRESTRON. To obtain warranty service for CRESTRON products, contact an authorized CRESTRON dealer. Only authorized CRESTRON dealers may contact the factory and request an RMA (Return Merchandise Authorization) number. Enclose a note specifying the nature of the problem, name and phone number of contact person, RMA number and return address.
2. Products may be returned for credit, exchange or service with a CRESTRON Return Merchandise Authorization (RMA) number. Authorized returns must be shipped freight prepaid to CRESTRON, 6 Volvo Drive, Rockleigh, N.J. or its authorized subsidiaries, with RMA number clearly marked on the outside of all cartons. Shipments arriving freight collect or without an RMA number shall be subject to refusal. CRESTRON reserves the right in its sole and absolute discretion to charge a 15% restocking fee plus shipping costs on any products returned with an RMA.
3. Return freight charges following repair of items under warranty shall be paid by CRESTRON, shipping by standard ground carrier. In the event repairs are found to be non-warranty, return freight costs shall be paid by the purchaser.

CRESTRON Limited Warranty

CRESTRON ELECTRONICS, Inc. warrants its products to be free from manufacturing defects in materials and workmanship under normal use for a period of three (3) years from the date of purchase from CRESTRON, with the following exceptions: disk drives and any other moving or rotating mechanical parts, pan/tilt heads and power supplies are covered for a period of one (1) year; touchscreen display and overlay components are covered for 90 days; batteries and incandescent lamps are not covered.

This warranty extends to products purchased directly from CRESTRON or an authorized CRESTRON dealer. Purchasers should inquire of the dealer regarding the nature and extent of the dealer's warranty, if any.

CRESTRON shall not be liable to honor the terms of this warranty if the product has been used in any application other than that for which it was intended or if it has been subjected to misuse, accidental damage, modification or improper installation procedures. Furthermore, this warranty does not cover any product that has had the serial number altered, defaced or removed.

This warranty shall be the sole and exclusive remedy to the original purchaser. In no event shall CRESTRON be liable for incidental or consequential damages of any kind (property or economic damages inclusive) arising from the sale or use of this equipment. CRESTRON is not liable for any claim made by a third party or made by the purchaser for a third party.

CRESTRON shall, at its option, repair or replace any product found defective, without charge for parts or labor. Repaired or replaced equipment and parts supplied under this warranty shall be covered only by the unexpired portion of the warranty.

Except as expressly set forth in this warranty, CRESTRON makes no other warranties, expressed or implied, nor authorizes any other party to offer any warranty, including any implied warranties of merchantability or fitness for a particular purpose. Any implied warranties that may be imposed by law are limited to the terms of this limited warranty. This warranty statement supersedes all previous warranties.

Trademark Information

All brand names, product names and trademarks are the sole property of their respective owners. Windows is a registered trademark of Microsoft Corporation. Windows95/98/Me/XP/Vista and WindowsNT/2000 are trademarks of Microsoft Corporation.

This page is intentionally left blank.

This page is intentionally left blank.



Crestron Electronics, Inc.
15 Volvo Drive Rockleigh, NJ 07647
Tel: 888.CRESTRON
Fax: 201.767.7576
www.crestron.com

Operations & Installation Guide – DOC. 6629A
(2019009)
03.08
Specifications subject to
change without notice.