


## DM Lite® Receiver for HDMI® Signal Extension over CATx Cable, Wall Plate, Black Textured

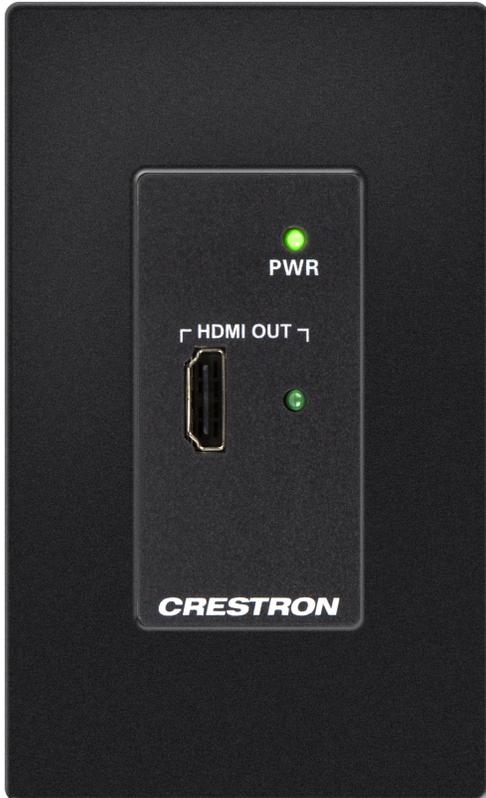

*(Faceplate sold separately)*

The HD-RX-101-C-1G-E-B-T is a DM Lite® wall plate receiver designed to pair with a DM Lite transmitter to form a signal extender for HDMI® signals. The DM Lite family of products offers a versatile solution for extending HD, UHD, 2K, and 4K video signals with stereo or surround sound audio over a single CAT5e (or higher) cable. A cable length of up to 230 ft (70 m) is supported for HD 1080p, UXGA, and 2K signals, or up to 130 ft (40 m) for UHD and 4K.<sup>1</sup>

**NOTE:** For applications requiring a surface-mountable version, refer to the [HD-RX-101-C-E](#) product page. For applications requiring IR or RS-232 signal extension, refer to the [HD-RXC-101-C-1G-E-B-T](#) product page.

The HD-RX-101-C-1G-E-B-T is designed to mount into a single-gang electrical box or plaster ring (not included). When paired with a surface-mountable transmitter, the HD-RX-101-C-1G-E-B-T is powered by the transmitter over the DM Lite link cable.<sup>2</sup>

**NOTE:** This product is not addressable from a control system and offers no programmable functionality. AV and CEC signals are simply passed through between a single transmitter and receiver pair. The RJ-45 link port on this product is exclusively intended for linking with a single DM Lite transmitter. It should not be used to connect to any other equipment or network. DM Lite technology is not compatible with PoE, PoDM, DigitalMedia 8G+®, or HDBaseT® technology.

- Pairs with a DM Lite® transmitter
- Enables extension of HDMI® video and audio signals
- Links to the transmitter via a single CAT5e (or higher) twisted pair cable
- Supports 4K and UHD at up to 130 ft (40 m)
- Supports HD 1080p, WUXGA, and 2K at up to 230 ft (70 m)
- Handles 4K video resolutions up to 4K60 4:2:0 and 4K30 4:4:4
- Handles 3D video and Deep Color
- Supports Dolby® TrueHD, Dolby Atmos®, DTS HD®, DTS:X®, and uncompressed 7.1 linear PCM audio
- Compatible with HDMI and DVI display devices
- HDCP 2.2 compliant
- Passes CEC and EDID signals
- Installs in a single-gang U.S. electrical box (2-1/4" deep) or plaster ring (not included)
- Decorator-style faceplate sold separately
- Normally powered by the transmitter (surface-mountable) over the link cable

## DM Lite® Receiver for HDMI® Signal Extension over CATx Cable, Wall Plate, Black Textured

### Specifications

#### Video

<b>Output Signal Type</b>	HDMI with Deep Color, 3D, and 4K (DVI compatible <sup>3</sup> )
<b>Copy Protection</b>	HDCP 2.2
<b>Maximum Resolution</b>	Common resolutions are listed in the following table.

Scan Type	Resolution	Frame Rate	Color Sampling	Color Depth
Progressive	4096x2160 DCI 4K and 3840x2160 4K UHD	24 Hz	4:4:4	30 bit
		30 Hz	4:4:4	24 bit
		30 Hz	4:2:2	36 bit
		60 Hz	4:2:0	24 bit
	2560x1600 WQXGA	60 Hz	4:4:4	36 bit
Interlaced	1920x1080 HD 1080i	60 Hz	4:4:4	36 bit
		30 Hz	4:4:4	36 bit

**NOTE:** Custom resolutions are supported at pixel clock rates up to 300 MHz.

#### Audio

<b>Output Signal Type</b>	HDMI
<b>Formats</b>	Dolby Digital®, Dolby Digital EX, Dolby Digital Plus, Dolby TrueHD, Dolby Atmos, DTS®, DTS ES, DTS 96/24, DTS HD High Res, DTS HD Master Audio, DTS:X, LPCM up to 8 channels

#### Communications

<b>HDMI</b>	HDCP 2.2, EDID, CEC pass-through
<b>DM Lite Link</b>	Proprietary link for connection between one DM Lite transmitter and receiver only

#### Connectors

<b>HDMI OUT</b>	(1) HDMI Type A connector, female; HDMI digital video/audio output (DVI compatible <sup>3</sup> )
<b>FROM TX (DM Lite, Rear)</b>	(1) 8-pin RJ-45 connector, female, shielded; DM Lite link port for connection to a DM Lite transmitter <sup>1</sup>

**24 VDC 1.25A (Rear)**

(1) 2-pin 3.5 mm detachable terminal block; 24 VDC power input

**NOTE:** A power pack is not included with the HD-RX-101-C-1G-E-B-T. When the HD-RX-101-C-1G-E-B-T is paired with a surface-mountable transmitter, the 24 VDC power input of the HD-RX-101-C-1G-E-B-T is not used. The power pack included with and connected to the surface-mountable transmitter is used to power both the transmitter and the HD-RX-101-C-1G-E-B-T.<sup>2</sup>

#### Indicators

<b>PWR</b>	(1) Green LED, indicates operating power is supplied from the transmitter via the DM Lite link or from a power pack via the 24 VDC input
<b>HDMI OUT</b>	(1) Green LED, indicates HDMI output signal presence
<b>FROM TX (DM Lite)</b>	(2) LEDs on RJ-45 connector, green LED indicates DM Lite link status, amber LED indicates a valid video signal

#### Power

<b>Power Pack (sold separately)</b>	Input: 100-240 VAC, 50/60 Hz; Output: 1.25 Amps @ 24 VDC
-------------------------------------	--

**NOTE:** The power pack is required only when the HD-RX-101-C-1G-E-B-T is paired with a wall plate transmitter. When the HD-RX-101-C-1G-E-B-T is paired with a surface-mountable transmitter, the power pack included with and connected to the transmitter is used to power both the transmitter and the HD-RX-101-C-1G-E-B-T.<sup>2</sup>

#### Environmental

<b>Temperature</b>	32° to 104° F (0° to 40° C)
<b>Humidity</b>	20% to 90% RH (non-condensing)

## DM Lite® Receiver for HDMI® Signal Extension over CATx Cable, Wall Plate, Black Textured

### Construction

<b>Composition</b>	Metal housing and bracket with black polycarbonate front label overlay
<b>Mounting</b>	Mounts in a 1-gang (or larger) 2-1/4 inch (57 mm) deep U.S. electrical box or plaster ring (not included)
<b>Faceplate</b>	Requires a decorator-style faceplate ( <a href="#">FP-G</a> series, sold separately)

### Dimensions

<b>Height</b>	4.08 in. (104 mm)
<b>Width</b>	1.81 in. (46 mm)
<b>Depth</b>	1.97 in. (50 mm)

### Weight

5.22 oz (148 g)

### Compliance

**Regulatory Model** HD-RX-101-C-1G-E-B-T

UL® Listed for US and Canada, CE, IC, FCC Part 15 Class B digital device

### Maximum DM Lite Link Cable Lengths

Resolution	CAT5e (or higher), <a href="#">DM-CBL-ULTRA DM® Ultra Cable</a> , or <a href="#">DM-CBL-8G DM 8G® Cable</a> <sup>1</sup>
1920x1080 FHD 1080p	230 ft (70 m)
1920x1200 WUXGA	
1600x1200 UXGA	
2048x1080 DCI 2K	
2048x1152 QWXGA	
2560x1080 UWFHD	130 ft (40 m)
2560x1440 WQHD	
2560x1600 WQXGA	
3840x2160 4K UHD	
4096x2160 DCI 4K	

### Model

**HD-RX-101-C-1G-E-B-T**

DM Lite® Receiver for HDMI® Signal Extension over CATx Cable, Wall Plate, Black Textured

### Accessories

For a list of accessories, visit the [HD-RX-101-C-1G-E-B-T](#) product page.

#### Notes:

- For the DM Lite link cable, use Crestron [DM-CBL-8G](#) DigitalMedia 8G™ cable, Crestron [DM-CBL-ULTRA](#) DigitalMedia™ Ultra cable, or third-party CAT5e (or higher). The maximum cable length is 230 ft (70 m) for resolutions up to 2K or 130 ft (40 m) for higher resolution signals up to 4K. Refer to the "Maximum DM Lite Link Cable Lengths" table for additional information. Shielded cable and connectors are required when bundling multiple cables in a wire run, and are recommended for all applications to safeguard against unpredictable environmental electrical noise that may impact performance at resolutions above 1080p. Wire and cables are sold separately. DM Lite devices are not compatible with DigitalMedia 8G+, HDBaseT, PoE, PoDM, or any other CATx based interface or network.
- For applications in which the HD-RX-101-C-1G-E-B-T is paired with a 1-gang transmitter (HD-TX-101-C-1G-E-B-T or HD-TX-101-C-1G-E-W-T), refer to Online Help Answer ID 1000168. A power pack must not be connected to both the receiver and transmitter simultaneously. DM Lite devices are not compatible with PoE or PoDM.
- The HDMI output requires an appropriate adapter or interface cable to accommodate a DVI signal. [CBL-HD-DVI](#) interface cables are available separately.

This product may be purchased from select authorized Crestron dealers and distributors. To find a dealer or distributor, please contact the Crestron sales representative for your area. A list of sales representatives is available online at [www.crestron.com/How-To-Buy/Find-a-Representative](http://www.crestron.com/How-To-Buy/Find-a-Representative) or by calling 855-263-8754.

This product is covered under the Crestron standard limited warranty. Refer to [www.crestron.com/warranty](http://www.crestron.com/warranty) for full details.

The specific patents that cover Crestron products are listed online at [patents.crestron.com](http://patents.crestron.com).

Certain Crestron products contain open source software. For specific information, please visit [www.crestron.com/opensource](http://www.crestron.com/opensource).

Crestron, the Crestron logo, DigitalMedia, DigitalMedia 8G, DigitalMedia 8G+, DM, DM 8G, and DM Lite are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. Dolby, Dolby Atmos, and Dolby Digital are either trademarks or registered trademarks of Dolby Laboratories in the United States and/or other countries. DTS, DTS HD, and DTS:X are either trademarks or registered trademarks of DTS, Inc. in the United States and/or other countries. HDBaseT is either a trademark or registered trademark of HDBaseT Alliance in the United States and/or other countries. HDMI and the HDMI logo are either trademarks or registered trademarks of HDMI Licensing LLC in the United States and/or other countries. UL is either a trademark or registered trademark of Underwriters Laboratories, Inc. in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography.

### HDMI

Specifications are subject to change without notice.

©2021 Crestron Electronics, Inc.

Rev 04/07/21

## DM Lite® Receiver for HDMI® Signal Extension over CATx Cable, Wall Plate, Black Textured

