


J-Box Integration Module with Standalone Timeclock for Zūm® Lighting Control

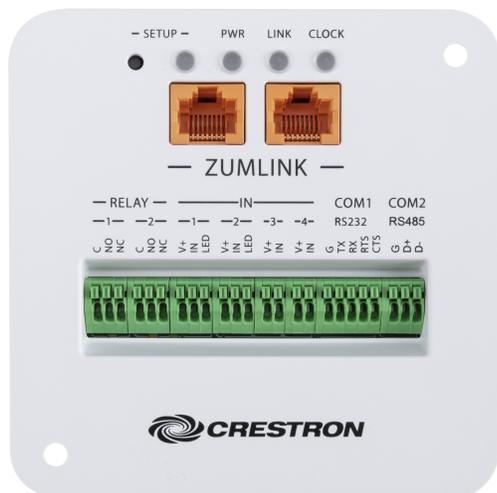

- *Zūm® wired junction box mounted multi-purpose integration and timeclock device*
- *Powered by Zūm link bus*
- *Provides a standalone astronomical time clock and local time and date settings without a ZUM-HUB4 or control system*
- *Provides a distributed, room level interface to third-party smart controllers, such as HVAC/VAV systems and shade controllers*
- *Supports in-room device daisy chaining with other Zūm wired devices*
- *Cover mount to a standard 4 in. square junction box*

The ZUMLINK-JBOX-IO is a compact, multi-purpose, standalone integration and timeclock device that applies schedules, events, and common integration protocols to a Zūm space without the need for a control system. As a Zūm Wired device, the ZUMLINK-JBOX-IO can be discovered by the Zūm app for easy configuration without custom programming. If needed, the ZUMLINK-JBOX-IO can also connect to a Crestron control system. The ZUMLINK-JBOX-IO mounts to a standard 4 in. square junction box, provides two Zūm Link serial bus RJ-45 ports, an RS-232 port, an RS-485 port, two dry contact closure outputs, two low-voltage inputs, and two low-voltage inputs with LED indicator light support. The ZUMLINK-JBOX-IO supports in-room device daisy chaining to any 24VDC Zūm Link run.

Zūm Link Wired Technology

Zūm Link technology enables in-room lighting control through keypads and sensors wired to controllers. Zūm Wired devices connect via CBL-CAT5E-ZUMLINK-P CAT5e cable (sold separately) to RJ-45 ports to provide simple daisy-chaining and lighting control of compatible loads. The Zūm Wired devices work together in a local ecosystem to provide customized solutions using the Zūm app.

Easy Installation

The ZUMLINK-JBOX-IO installs in a standard four-inch square junction box. Depending on the installation requirements of the space, the ZUMLINK-JBOX-IO can be installed with the connections facing out or into the junction box. Connect the ZUMLINK-JBOX-IO to Zūm devices (load controllers, keypads, and sensors) utilizing Zūm Link connections.

Astronomical Time-Clock Control

Enables control of standalone Zūm spaces based on date and time without the need for system networking or a centralized control hub. Configure date and time, schedules, events, and holidays from the Zūm app directly to the space.

J-Box Integration Module with Standalone Timeclock for Zūm® Lighting Control

Specifications

Zūm Link Power Bus Requirements

Max Current Consumption	110mA
Max Keypad Feedback LED Current	20mA
Feedback LED Current	<i>Passthrough from Zūm Link bus</i>

Timeclock Backup Power

Battery Backup Life	10 years
----------------------------	----------

Wired Communications

ZUMLINK	(2) RJ-45 ports; In-room Zūm Link device daisy-chaining
----------------	--

Controls and Indicators

SETUP	(2) Pushbutton and (1) green LED; Indicates On/Off status of connected load; Lights briefly to indicate a button press
PWR	(2) Bi-color LED; Power indicator; Turns red when power is first applied for approximately 0.5 seconds and then turns green
ZUMLINK	(2) Green LED; LED lights green in normal operation
CLOCK	(2) Green LED indicates when: A unit is part of a Zūm Link network; The time and location have been set; One or more timeclock events have been configured; The LED blinks for 0.5 seconds on/off when timeclock is in manual or maintained override

Connections

C, NO, NC RELAY	(2) 3-pin terminal blocks for output relays; 30VAC/VDC 1A; Each terminal accepts one 20-24 AWG wire
V+, IN, LED IN	(2) 3-pin terminal blocks for input relays with keyswitch LED support; Each terminal accepts one 20-24 AWG wire
V+, N IN	(2) 2-pin terminal blocks for input relays without keyswitch support Each terminal accepts one 20-24 AWG wire

RS-232 COM1

(1) 5-pin terminals block
G, TX, RX, RTS, CTS
Each terminal accepts one 20-24 AWG wire

NOTE: The RS-232 COM port is intended for use with relatively simple devices that send and receive small packets and do not generate a lot of data. A small amount of delay may be normal when sending or receiving some control commands on a low-speed serial network. Zūm and Cresnet networks with many devices tend to exhibit more delay.

RS-485 COM2

(1) 3-pin terminal block
G, D+, D-
Each terminal accepts one 20-24 AWG wire

Environmental

Temperature	32° to 104°F (0° to 40°C)
Humidity	10% to 90% RH (noncondensing)
Heat Dissipation	6 BTU/hr

Construction

Housing	Plastic, white, UL 94 5VA flame rated
Mounting	Mounts to the side of a 4 in. square junction box; Meets UL 2043 requirements for installation in an environmental air-handling (plenum) space

Dimensions

Height	4.16 in. (106 mm)
Width	4.16 in. (106 mm)
Depth	0.99 in. (25 mm)

Weight

6 oz (171 g)

Compliance

Regulatory Model: M202107004

cUL916, cUL2043

UL® Listed for US & Canada, IC, FCC Part 15 Class A digital device, UL 916, UL 2043, UL 94 5VA

J-Box Integration Module with Standalone Timeclock for Zūm® Lighting Control

Model

ZUMLINK-JBOX-IO

J-Box Integration Module with Standalone Timeclock for Zūm® Lighting Control

Available Accessories

For a list of available accessories, visit the ZUMLINK-JBOX-IO product page.

The original language version of this document is U.S. English. All other languages are a translation of the original document.

This product may be purchased from select authorized Crestron dealers and distributors. To find a dealer or distributor, please contact the Crestron sales representative for your area. A list of sales representatives is available online at www.crestron.com/How-To-Buy/Find-a-Representative or contact us for additional information by visiting www.crestron.com/contact/our-locations for your local contact.

The product warranty can be found at www.crestron.com/warranty.

The specific patents that cover Crestron products are listed online at www.crestron.com/legal/patents.

Certain Crestron products contain open source software. For specific information, please visit www.crestron.com/opensource.

Crestron, the Crestron logo, and Zūm are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. UL is either a trademark or registered trademark of UL LLC in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography.

Specifications are subject to change without notice.

©2024 Crestron Electronics, Inc.

Rev 04/30/24

J-Box Integration Module with Standalone Timeclock for Zūm® Lighting Control

