

GLA-IR-VS-DIM by Steinel

0-10 V Dimming Passive Infrared Wall Switch Vacancy Sensor



The IR VS DIM is a line voltage, Passive Infrared (PIR) wall switch vacancy (manual ON) sensor with 0-10 volt dimming capability intended to control lighting in commercial spaces. PIR is used where the sensor will have a clear view of the occupants in the desired coverage area. Control options via Smart Remote include photocell force OFF or hold OFF and partial ON or partial OFF capabilities. The convenient “Switch Link” feature enables up to four sensors to link together for peer to peer grouping achieving expanded detection zones and multiway switching.

Applications

The typical application is for small offices, conference rooms, storage closets and break rooms. For best performance use this sensor in enclosed spaces no larger than 18’ x 15’.

Key Features:

- 0-10 volt dimming PIR (passive infrared) wall switch vacancy sensor
- Line voltage lighting control (120/230/277 VAC, 50/60 Hz)
- 180° coverage pattern
- Manual ON (Factory Setting)
- Partial ON can be adjusted from 10 - 70%
- Partial OFF can be adjusted from 10 - 50%
- Hold OFF or Force OFF light level feature
- Mounts to a single-gang NEMA-style, standard switch box & decorator-style wall plate by others
- “Switch Link” communication allows for up to 4 sensors to be grouped together
- IQ Mode dynamically adjusts the ‘ON’ time delay by learning individual room occupancy
- Walk through mode option will switch the load OFF in 3 minutes if no additional detection occurs after the first 30 seconds
- Visible alert feature provides a momentary OFF/ON blink, warning that the load will shut OFF in 10 seconds unless additional motion is detected
- Service mode option deactivates the automated functions of the sensor and the load is only manually controlled using the ON/OFF, DIM UP and DIM down buttons
- The Button Link feature allows the installer to enable or disable communication of the DIM UP, ON/OFF and DIM DOWN manual button on the Switch Link communication traveler.
- Optional voltage barrier included to provide separation from class 1 and class 2 circuits

Item No.	IR VS DIM-W (white) IR VS DIM-LA (light almond) IR VS DIM-BK (black) IR VS DIM-GY (gray)
Voltage	120/230/277 VAC, 50/60 Hz
Mounting	single-gang NEMA-style switch box (standard switch box) & decorator-style wall plate by others
Load Rating	0-800 watts @ 120/230/277 VAC, 50/60 Hz tungsten, magnetic or electronic ballast • 1/6 hp 0-600 watts @ 120/230/277 VAC, 50/60 Hz CFL or LED electronic ballasts C ≤ 132 µF max.
Sensing Technology	passive infrared (PIR)
Dimming Output	0-10 volt (purple & gray) 50 mA, max 25 (0-10 volt electronic dimming ballasts/drivers)
Time Setting	IQ/Test, 5, 15, 30 minutes
Light Level Setting	80 - 2000 Lux / 8 - 200 fc
Environment	IP20 rated, 0°C to +40°C, 32°F to +104°F
PIR Coverage at 1.2 m / 4 ft Mounting Height	minor motion: max. 6.5 x 5.5 m (36 sq.m.) max. 21 x 18 ft (378 sq.ft.) radial: max. 7 m (77 sq.m.) 24 ft (904 sq.ft.) tangential: max. 16.5 m (628 sq.m.) 54 ft (4,500 sq.ft.)
Dimensions	105 x 44.1 x 46.5 mm, 4.13 x 1.74 x 1.83 in, (LxWxD)
Warranty	5 years
Certifications	C-UL-US Listed, RoHS compliant, California Compliant

PIR
VACANCY

PIR
Manual ON



21 Ft Minor Motion
54 Ft Tangential



8 - 200 fc

120/230/
277V

Line Voltage

DIM


0 - 10 Volt Dimming

GLA-IR-VS-DIM by Steinel


Dual Technology Vacancy Sensor




Wiring

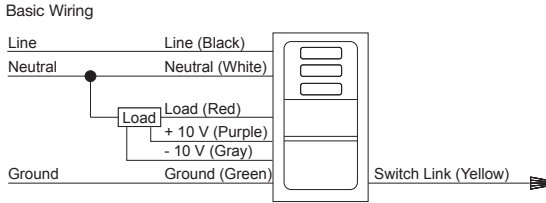


(Master / Auxiliary) Three-way Wiring - up to maximum 4 sensors can be grouped via Switch Link

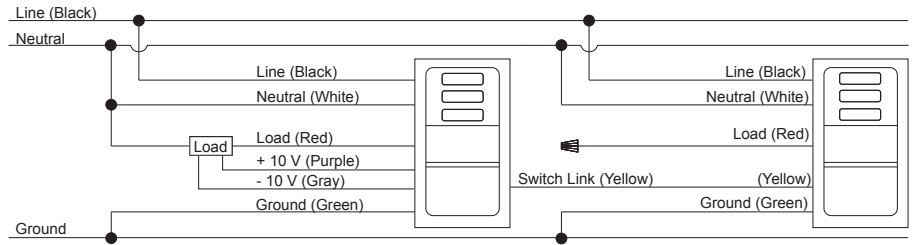

Components

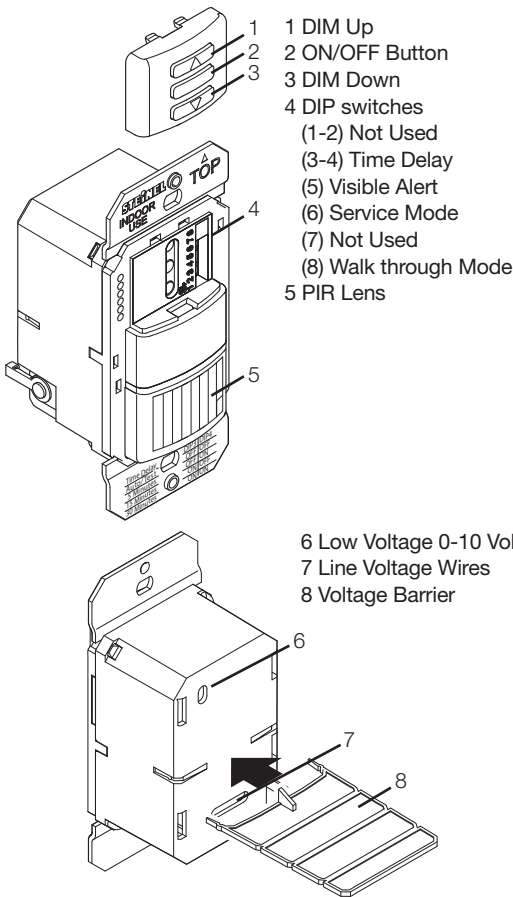

(Master / Master) Three-way Wiring - up to maximum 4 sensors can be grouped via Switch Link

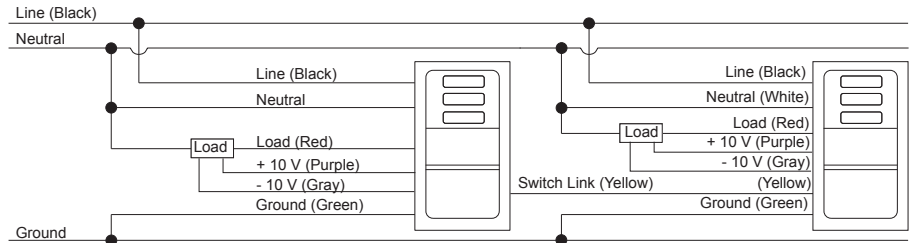


Settings

On	Off	
<input type="checkbox"/>	<input type="checkbox"/>	Walk Through
<input type="checkbox"/>	<input type="checkbox"/>	Not Used
<input type="checkbox"/>	<input type="checkbox"/>	Service Mode
<input type="checkbox"/>	<input type="checkbox"/>	Visible Alert
<input type="checkbox"/>	<input type="checkbox"/>	Time Delay
<input type="checkbox"/>	<input type="checkbox"/>	Time Delay
<input type="checkbox"/>	<input type="checkbox"/>	Not Used
<input type="checkbox"/>	<input type="checkbox"/>	Not Used


Time Delay	DIP 3	DIP 4
IQ / Test	OFF	OFF
5 Minutes	OFF	ON
15 Minutes	ON	OFF
30 Minutes	ON	ON

Coverage

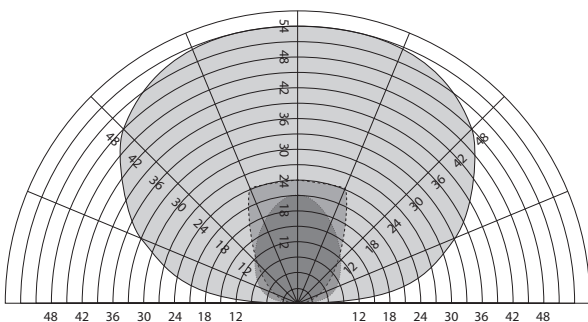

— PIR Tangential Coverage
- - - PIR Radial Coverage
- - - PIR Minor Motion Coverage

Smart Remote



Description

- Setting done by APP and universal Smart Remote
- Replaces all existing remote controls
- Connection via Bluetooth with smartphones and tablets
- iOS and Android APP
- Saving/loading of settings for easy copy & paste installation

