

Flush Mount Kit for 6 in. or 8 in. Reference and Ultimate In-Ceiling Speakers, 1 Pair

The flush mount kit accessory for Crestron speakers made by Origin Acoustics is compatible with the following Reference and Ultimate speakers:

- [REFERENCE IC6-W-T-EACH](#)
- [REFERENCE IC8-W-T-EACH](#)
- [ULTIMATE IC6-AW-W-T-EACH](#)
- [ULTIMATE IC6-W-T-EACH](#)
- [ULTIMATE ICS8-AW-W-T-EACH](#)
- [ULTIMATE IC8-AW-W-T-EACH](#)
- [ULTIMATE IC8-DT-AW-W-T-EACH](#)

These kits allow for in-ceiling speakers to be mounted so the room-side surface of the speaker grille is flush with the drywall surface.

The flush mount kits are available in square (SQ) and circular shapes.



In the Box

- 1 SPKA-FMKT-IC6/IC8
or
- 1 SPKA-FMKT-IC6/IC8-SQ




Installation

Prepare the Mounting Hole

Before finalizing the speaker location, check to make sure there are no fixtures, pipes, air ducts, joists, or other possible obstructions. If applicable, use a good quality stud finder to locate joists.

To identify obstructions, do the following:


- Use a drywall saw to cut a small hole at a 45° angle. An angle cut simplifies repair since the removed piece can be reinserted to help plug the hole.

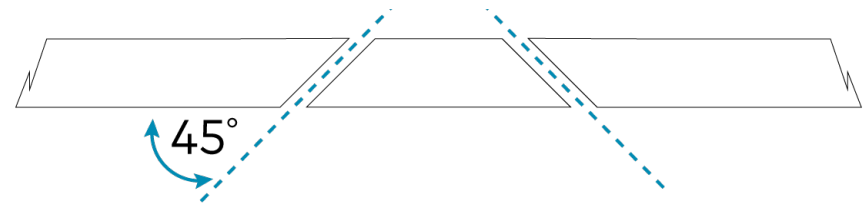

- Use a piece of stiff cable, bent into an L shape, with one end long enough to explore an area equal to the size of the speaker. Insert the cable into the hole, make sure it rotates freely in a complete circle and that there is sufficient depth.


If there are no obstructions, use the supplied template to trace an outline of the mounting hole on the ceiling. Cut the final mounting hole at a 90° angle to the ceiling.

Flush Mount Kit for 6 in. or 8 in. Reference and Ultimate In-Ceiling Speakers, 1 Pair

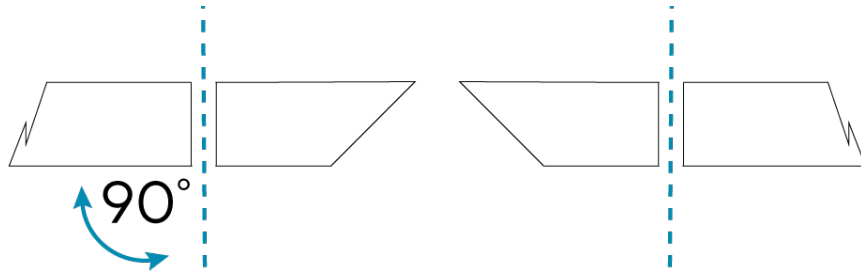

1. Fit the flush mount kit into the opening and ensure it sits flat against the drywall.

Circular Flush Mount Kit

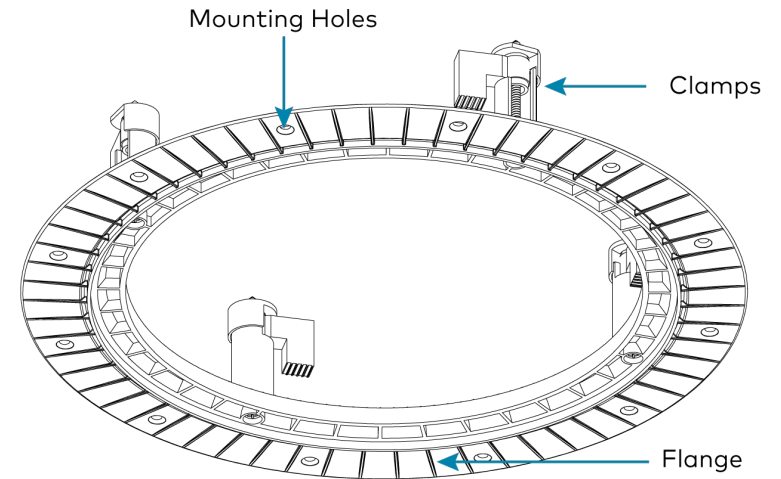


Install the Flush Mount Kit

Use the [SPKA-FMKT-IC6/IC8](#) and [SPKA-FMKT-IC6/IC8-SQ](#) flush mount kit to install the speakers on a room-side surface. This accessory must be purchased separately.

Flush Mount Kit for 6 in. or 8 in. Reference and Ultimate In-Ceiling Speakers, 1 Pair

Square Flush Mount Kit

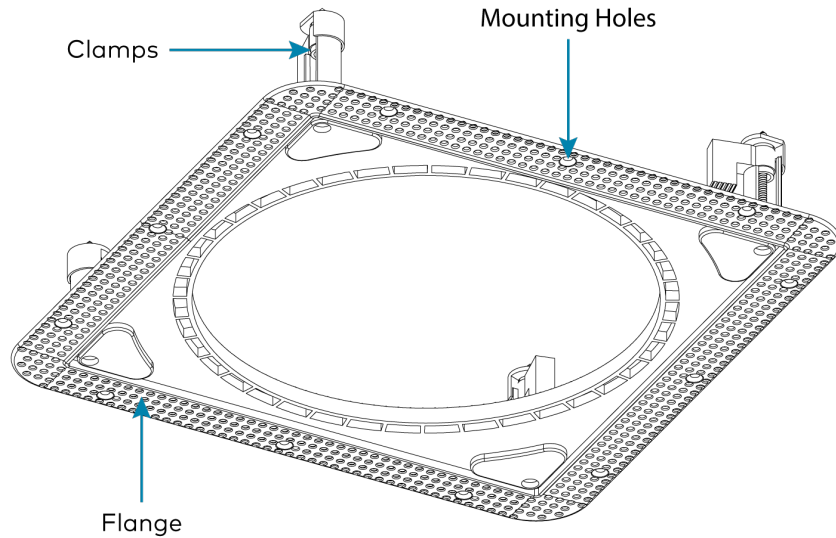

2. Use a Philips screwdriver to turn the screw inside each clamp to tighten the clamps and secure the bracket in the ceiling.
3. To secure the flush mount kit to the drywall, use a screw gun/drill to drive drywall screws through the mounting holes in the flange.

Finish the Drywall

1. With an applicator (not included), apply joint compound over the bracket to seal and blend the bracket into the ceiling.
2. Apply the joint compound beginning 6-8 in. (152-203 mm) from the flush mount kit's edge and then feather outward 16-20 in. (406-508 mm) to achieve a smooth, flat transition.

NOTE: Make sure that enough joint compound is applied around the flush mount kit to make a very gradual transition from the surface to the edge of the flush mount kit.

Flush Mount Kit for 6 in. or 8 in. Reference and Ultimate In-Ceiling Speakers, 1 Pair



Visit the Product Page

Scan the QR code to visit the product page.

SPKA-FMKT-IC6/IC8



www.crestron.com/model/6511894

SPKA-FMKT-IC6/IC8-SQ



www.crestron.com/model/6512636

Additional Information

Original Instructions

The U.S. English version of this document is the original instructions. All other languages are a translation of the original instructions.

Regulatory Model: M202046010

Crestron product development software is licensed to Crestron dealers and Crestron Service Providers (CSPs) under a limited nonexclusive, nontransferable Software Development Tools License Agreement. Crestron product operating system software is licensed to Crestron dealers, CSPs, and end-users under a separate End-User License Agreement. Both of these Agreements can be found on the Crestron website at www.crestron.com/legal/software_license_agreement.

The product warranty can be found at www.crestron.com/warranty.

The specific patents that cover Crestron products are listed at www.crestron.com/legal/patents.

Certain Crestron products contain open source software. For specific information, visit www.crestron.com/opensource.

Crestron and the Crestron logo are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. Origin Acoustics is either a trademark or a registered trademark of Origin Acoustics, Inc. in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography. Specifications are subject to change without notice.

©2022 Crestron Electronics, Inc.

Doc. 9228B

11/22/22