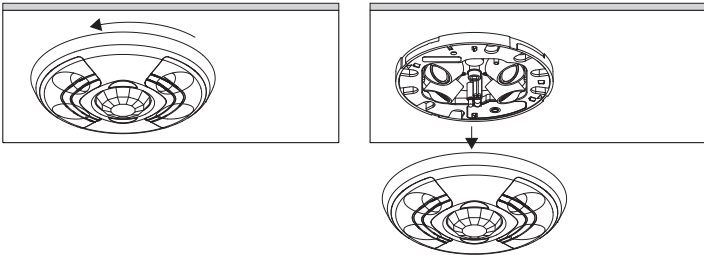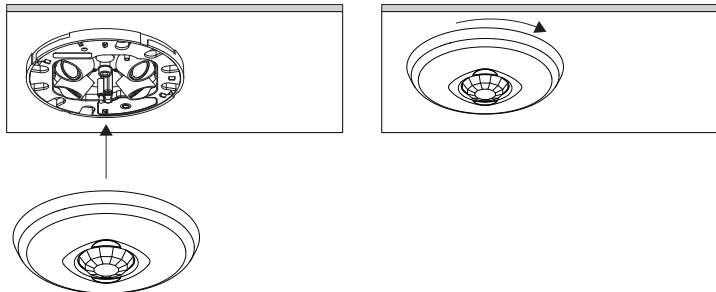**CRESTRON.**

Installation

NOTE: If using on a GLS-ODT-C-CN or GLS-ODT-C–NS sensor, disable the ultrasonic motion transducers. Refer to the GLS-ODT-C-CN Guide (Doc. 7427), GLS-ODT-C-NS Guide (Doc. 7428), or GLS-REMOTE-ODT/OIR Guide (Doc. 7541) at www.crestron.com/manuals for more information.

Install the Crestron® occupancy sensor lens.

1. Turn the occupancy sensor cover counterclockwise, and then remove it from the device.

2. Place the GLSA-ODT/OIR-FP-500 occupancy sensor cover on the device and then rotate the cover clockwise to secure it to the device.

Additional Resources

Visit the product page on the Crestron website (www.crestron.com) for additional information and the latest firmware updates. Use a QR reader application on your mobile device to scan the QR image.