

# HZ2-KPEX

## Horizon® 2 In-Wall Keypad with infiNET EX® Wireless Communication, 120 VAC



Shown with Custom Engraving on a Style 1 Button Assembly, Faceplate not included

- Can act as a multiway controller for a connected dimmer or switch using a traveler wire in a traditional three- or four-way circuit ([HZ2-DIMEX](#), [HZ2-DIMUEX](#), and [HZ2-SWEX](#), all sold separately)
- Capable of being powered by either 120 VAC line voltage or 60 VDC low voltage (sold separately)
- Line based multiway control for reliability across all load types
- 1- to 4-gang U.S. wall box installation
- Mount up to four Horizon® 2 devices with Horizon 2 multi-gang faceplates ([HZ2-FP-G series](#), sold separately)
- Robust infiNET EX® wireless communication
- Preinstalled 5 single button assembly (Style 1) with Default Engraving or can be configured with six different button assemblies with Custom Engraving
- Multicolor RGB LEDs provide backlighting for engraved buttons - a different color can be set for each button, including white
- White LED backlighting is available and can be set between 2000K and 8000K
- Replacement button assemblies available in six styles to accommodate changes in device function or updated engravings
- Blank button assemblies can be engraved by a third-party
- Ambient light sensor for auto-dimming day and night backlight modes
- Fully programmable via a Crestron control system
- Local button functionality for load control without programming
- Requires neutral wire connection
- Crestron Home® OS compatible
- Available in white, almond, and black

The [HZ2-KPEX](#) is a Horizon® 2 keypad that provides infiNET EX® wireless network control of lighting, shading, audio, and other amenities throughout a home. Its design matches the entire line of Horizon dimmers, switches, and keypads, making it a great addition to new or retrofit installations.

The HZ2-KPEX is available with default engraving on a five pushbutton button assembly (Style 1) or custom engraving on any style button assembly.

- Default engraving on a five pushbutton button assembly (Style 1) is provided with the HZ2-KPEX-A, HZ2-KPEX-W, and HZ2-KPEX-B. The default engraving includes a simple dot to provide feedback and indicate where the button can be pressed.



- Custom engraving on any style button assembly is provided with the HZ2-KPEX-A ENGRAVED, HZ2-KPEX-W ENGRAVED, and HZ2-KPEX-B ENGRAVED. The custom engraved button assembly is installed prior to shipment and replaces the default button assembly with default engraving.



**NOTE:** Faceplates are not included. Refer to the [HZ2-FP-G series](#) faceplates for more information.

### Integrated Keypad

Supporting up to five buttons in six available button configurations, the HZ2-KPEX is configurable for a variety of

# HZ2-KPEX

## Horizon® 2 In-Wall Keypad with infiNET EX® Wireless Communication, 120 VAC

applications. Because the device is attached to the Crestron® network, it can function as a keypad to trigger remote actions.

### Button Engraving

Custom laser-etched engraving is used to identify the functionality of each button on the button assembly. When a custom engraved model is ordered, the engraved button assembly is installed on the device before it is shipped. Create engraving files using Impress, the Crestron Home Setup app, the Crestron Home Online Configurator, or D3Pro. If necessary, custom engraving can be changed up until the order is processed by emailing [orders@crestron.com](mailto:orders@crestron.com) with the engraving file.

If the engraving or button assembly has not been finalized before an order is placed, default engravings can be replaced with custom engravings by sending an engraving file to [orders@crestron.com](mailto:orders@crestron.com) before the order ships. If the updated engraving order maintains the same product types and quantities as the original order, it will be processed in the order that it was originally received.

To order replacement engravings, refer to the [HZ2-BTNS ENGRAVED](#) button assembly product page.

Button assemblies without engravings (BLANK models) are available separately and can be used as-is or custom engraved by a third-party engraver.

**NOTE:** Devices ordered with custom engraving (ENGRAVED models) are provided with the button assembly indicated on the engraving order. The button assembly is installed prior to shipment and replaces the default button assembly with default engraving.

### Multicolor Backlit Buttons

The engraved buttons are illuminated using the device's RGB LED backlights. Each button can be assigned custom color backlighting. The LED backlight provides feedback by changing the intensity, changing the color, or flashing to show that an action is being performed.

Local color theme sets the colors for all buttons on the device. In addition to the local color theme, each button can be assigned an alternate color theme. Thirteen local color themes are available that include Tunable White (default is Warm White), Neutral White, Cool White, and a variety of common colors. The local color theme and alternate color themes can be changed programmatically.

### Field-Replaceable Button Assemblies

The field-replaceable button assemblies allow for changes in device function or to allow the customer to use the system before finalizing the engravings. The button assembly can be replaced with any of the six [HZ2-BTNS](#) button assembly configurations and are available with custom engraving

(ENGRAVED models) or no engraving (BLANK models).

The HZ2-KPEX devices are available in the following styles:

- **HZ2-BTNS-1 (Style 1):** 5 single buttons



- **HZ2-BTNS-2 (Style 2):** 4 single buttons and 1 split rocker button; Split rocker button is located in the lowest button position



- **HZ2-BTNS-3 (Style 3):** 4 single buttons and 1 split rocker button; Split rocker button is located in the second lowest button position



# HZ2-KPEX

## Horizon® 2 In-Wall Keypad with infiNET EX® Wireless Communication, 120 VAC

- **HZ2-BTNS-4 (Style 4):** 3 single buttons and 2 split rocker buttons; Split rocker buttons are located in the two lowest button positions



- **HZ2-BTNS-5 (Style 5):** 1 medium rocker button and 2 single buttons; Single buttons are located in the two lowest button positions




- **HZ2-BTNS-6 (Style 6):** 1 large rocker button



### Multigang Expansion with Horizon 2 Faceplates

Install up to four Horizon® 2 devices side-by-side in a US multigang electrical box with a compatible [HZ2-FP-G](#) series faceplate. When multiple devices are installed in a 2-, 3-, or 4-gang faceplate, the buttons on the devices are aligned to form one continuous control surface.

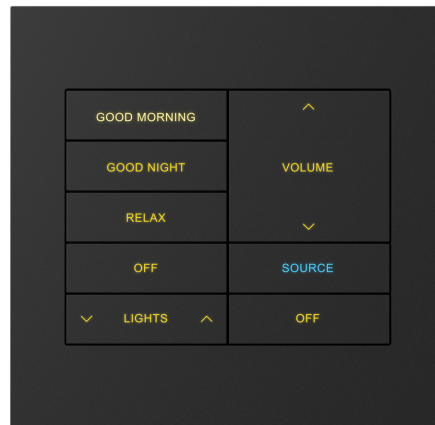

### Ambient Light Sensor

To ensure optimal visibility under varying lighting conditions, the button backlighting and indicator intensity adjusts automatically according to the amount of ambient light in the room.

### Multiway Control

Similar to traditional three- or four-way circuits, the HZ2-KPEX lets you control the lights from multiple locations using the traveler wire. Up to four devices can be connected to a single dimmer or switch. The HZ2-KPEX provides button backlights and six different engravable button assembly options while the HZ2-AUX provides no button backlight and a single large rocker button assembly (Style 6). The multiway controller provides instant usability upon installation without the need for programming.

**NOTE:** The HZ2-KPEX cannot be used to control a load directly. It must be used in conjunction with a [HZ2-DIMEX](#), [HZ2-DIMUEX](#), and [HZ2-SWEX](#), (all sold separately).

### Standard Wall Mount

Horizon keypads are designed for installation in a standard electrical wall box, making them perfect for installation in a multi-gang box alongside other Horizon devices.

# HZ2-KPEX

## Horizon® 2 In-Wall Keypad with infiNET EX® Wireless Communication, 120 VAC

### infiNET EX® Wireless Communications

infiNET EX wireless technology provides two-way RF communications throughout a residential or commercial structure without the need for physical control wiring. Each infiNET EX device acts as an expander by sending command signals to other infiNET EX devices in range (approximately 150 ft (46 m) indoors) to ensure reliability and stability.

The device communicates with a control system via a [Crestron Wireless Gateway](#) (sold separately). Up to 100 infiNET EX devices may coexist on a wireless network.

**NOTE:** Any infiNET EX device that provides expander functionality will effectively extend the range of the wireless network beyond the initial range of the gateway. Battery-powered infiNET EX devices do not provide expander functionality. A dedicated infiNET EX Wireless Expander is also available ([CLW-EXPEX](#), sold separately).

### Specifications

#### Power Requirements

<b>Line Power</b>	120VAC, 50/60 Hz; Requires neutral wire connection
<b>DC Power</b>	60VDC, 30 mA (Requires a SolaHD® SDP™ 1-48-100T power supply, sold separately)

#### Controls

<b>Airgap</b>	(1) Switch at the bottom of the device; Controls power to the device and connected loads
<b>Pushbutton</b>	(9) Pushbuttons, located under the button assembly; Pushbuttons are actuated by the button assembly that is installed
<b>Button Assembly</b>	(1) Button assembly included; Compatible with Style 1–6 button assemblies
<b>Setup</b>	(1) Pushbutton; Front of the faceplate must be removed to access the pushbutton; Can be used to set the local LED backlight color theme or calibrate the ambient light sensor

#### LED Indicator and Light Sensor

<b>LED Feedback</b>	(5) RGB LED backlights; Supports one local color theme for all LEDs; Supports one alternate color theme for each backlit position
<b>Light Sensor</b>	(1) Photosensor with adjustable sensitivity; Detects the ambient room light level to activate day or night mode and autodimming the backlight

**NOTE:** Light sensor performance may be affected by obstructions placed below the keypad.

#### Wireless

<b>RF Transceiver</b>	infiNET EX® 2-way RF, 2.4 GHz ISM Channels 11-26 (2400 to 2483.5 MHz), default channel 15; IEEE 802.15.4 compliant
-----------------------	--

# HZ2-KPEX

## Horizon® 2 In-Wall Keypad with infiNET EX® Wireless Communication, 120 VAC

<b>Range (typical)</b>	150 ft (46 m) indoor, 250 ft (76 m) outdoor to nearest mesh network device; Subject to site-specific conditions and individual device capabilities
<b>Gateway</b>	Requires a <a href="#">Crestron Wireless Gateway</a> (sold separately)

### Connections

<b>Line</b>	(1) Screw clamp terminal, consists of (2) wire inserts and (1) black screw head; Line power input; Accepts (1) 14-12 AWG wire per insert, do not insert wires behind screw head
<b>Neutral</b>	(1) Screw clamp terminal, consists of (2) wire inserts and (1) silver screw head; Neutral input; Accepts (1) 14-12 AWG wire per insert, do not insert wires behind screw head
<b>Remote</b>	(1) Screw clamp terminal, consists of (2) wire inserts and (1) blue screw head; Remote input from <a href="#">HZ2-AUX</a> or <a href="#">HZ2-KPEX</a> ; Accepts (1) 14-12 AWG wire per insert, do not insert wires behind screw head
<b>Ground</b>	(1) 12 AWG flying lead, Class 1, green with yellow stripe; Ground; Wire nut included

### Environmental

<b>Temperature</b>	32° to 86°F (0° to 30°C)
<b>Humidity</b>	10% to 90% RH (noncondensing)

### Construction

<b>Mounting</b>	Mounts in a 1- to 4-gang U.S. electrical box (not included); Metal mounting ring included; 3.5 in. (26 mm) electrical box depth recommended; Derating required in multigang applications
<b>Faceplate</b>	Requires a Horizon® 2 faceplate with mounting bracket ( <a href="#">HZ2-FP-G</a> , sold separately); Metal mounting plate provides precise alignment during device installation and faceplate assembly; Multigang installations require a 2-, 3-, or 4-gang Horizon® 2 faceplate with mounting bracket ( <a href="#">HZ2-FP-G</a> , sold separately)

### Dimensions

<b>Height</b>	4.38 in. (112 mm)
<b>Width</b>	1.80 in. (46 mm)
<b>Depth</b>	1.75 in. (45 mm) overall, extends 0.44 in. (12 mm) from wall surface when installed

### Weight

6.6 oz (187 g)

### Compliance

FCC, UL, IC

**Regulatory Model: M201849001**

To search for product certificates, refer to [support.crestron.com/app/certificates](http://support.crestron.com/app/certificates).

### Models

#### HZ2-KPEX-A ENGRAVED

Horizon® 2 In-Wall Keypad with infiNET EX® Wireless Communication, 120 VAC, Custom Engraved, Almond

#### HZ2-KPEX-B ENGRAVED

Horizon® 2 In-Wall Keypad with infiNET EX® Wireless Communication, 120 VAC, Custom Engraved, Black

#### HZ2-KPEX-W ENGRAVED

Horizon® 2 In-Wall Keypad with infiNET EX® Wireless Communication, 120 VAC, Custom Engraved, White

#### HZ2-KPEX-A

Horizon® 2 In-Wall Keypad with infiNET EX® Wireless Communication, 120 VAC, Standard Engraved, Almond

#### HZ2-KPEX-B

Horizon® 2 In-Wall Keypad with infiNET EX® Wireless Communication, 120 VAC, Standard Engraved, Black

#### HZ2-KPEX-W

Horizon® 2 In-Wall Keypad with infiNET EX® Wireless Communication, 120 VAC, Standard Engraved, White

### Available Accessories

For a list of available accessories, visit the [HZ2-KPEX](#) product page.

This product may be purchased from select authorized Crestron dealers and distributors. To find a dealer or distributor, please contact the Crestron sales representative for your area. A list of sales representatives is available online at [www.crestron.com/How-To-Buy/Find-a-Representative](http://www.crestron.com/How-To-Buy/Find-a-Representative) or contact us for additional information by visiting [www.crestron.com/contact/our-locations](http://www.crestron.com/contact/our-locations) for your local contact.

# HZ2-KPEX

## Horizon® 2 In-Wall Keypad with infiNET EX® Wireless Communication, 120 VAC

The original language version of this document is U.S. English.  
All other languages are a translation of the original document.

The product warranty can be found at [www.crestron.com/warranty](http://www.crestron.com/warranty).

The specific patents that cover Crestron products are listed online at [patents.crestron.com](http://patents.crestron.com).

Certain Crestron products contain open source software. For specific information, please visit [www.crestron.com/opensource](http://www.crestron.com/opensource).

Crestron, the Crestron logo, Crestron Home, Horizon, and infiNET EX are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. SolaHD and SDP are either a trademark or registered trademark of APPLETON GRP LLC in the United States and/or other countries. Corian is either a trademark or registered trademark of DuPont de Nemours, Inc. in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography.

Specifications are subject to change without notice.

©2023 Crestron Electronics, Inc.

Rev 03/20/23