Crestron Flex Small Room Conference System with Jabra® PanaCast® 50 Video Bar and Wall Mounted Control Interface for Microsoft Teams® Rooms, India



- Front-of-room video conferencing solution for a Microsoft Teams® Rooms environment
- Native Microsoft Teams® Rooms touch screen UI provides a consistent, simple user experience with one-touch meeting joins
- Complete kit contains a 10.1 in. wall mount touch screen, Jabra® PanaCast® 50 video bar for Crestron Flex systems, UC bracket assembly, and PoE injector— just add a display and mount
- Easy to specify and install no custom design, programming, or software installation required
- Optional integration with Crestron® control systems
- Direct connection option between UC Engine and wall mount touch screen for simple installation and configuration
- Network management and provisioning, system alerts, and wall mount touch screen pairing to the system's UC Engine through the XiO Cloud® service
- Premium-level support with Crestron Flex Care (optional)
- Enterprise-grade security connects and communicates securely over any enterprise or SMB network
- Supports single or dual video displays (not included)

The UC-B31-T-WM-INDIA Crestron Flex wall mount conferencing system provides a small room video conference solution for use with Microsoft Teams® Rooms software. It supports single or dual video displays¹ (not included) and features a wall mount touch screen, Jabra® PanaCast® 50 video bar for Crestron Flex systems, UC bracket assembly, PoE injector, and cables.

Native Microsoft Teams® Rooms Experience

The UC-B31-T-WM-INDIA system brings the full Microsoft Teams Rooms UC experience to any meeting space in an enterprise or SMB facility.

Intuitive User Interface

With a large 10.1 in. (257 mm) capacitive touch screen display, the Crestron® wall mount touch screen (TSW-1070) provides superior conferencing control in meeting rooms, huddle spaces, and executive offices. The touch screen also offers optional control of room lighting, shades, thermostats, and other equipment.²

Simplified Deployment

The UC Bracket Assembly provides preassembled components on one ready-to-mount bracket to simplify installation. The assembly can be mounted on a wall, or it can be attached to the rear of the display device. Crestron's direct connection method further simplifies installation with a single connection from the wall mount touch screen to the UC Bracket Assembly.³

Wall Mount Options

Using the bracket provided, the touch screen is easily installed over a 2-gang or 3-gang US electrical box, or a 2-gang European or UK electrical box. A security latch option is included to deter unauthorized removal of the touch screen.

High-Definition Video Conferencing with Impressive Audio

High-quality speakers and microphones deliver exceptional full-duplex performance from the Jabra PanaCast 50 video bar for Crestron Flex systems (<u>UC-SB-P50-INDIA</u>). Three built-in conferencing cameras capture the room in panoramic 4K resolution with a seamless 180° horizontal field of view.

Visit <u>jabra.com/panacast50</u> for more information on the Jabra PanaCast 50 video bar for Crestron Flex systems.

Crestron Control System Integration

The UC-B31-T-WM-INDIA integrates with a Crestron control system to enable touch screen control of room lighting, motorized window shades, climate control, AV, and other amenities.²

Enterprise-Grade Security

Crestron Flex is an enterprise-grade solution, engineered in partnership with Microsoft to integrate seamlessly into any Microsoft Teams Rooms software deployment. Crestron Flex is ideally equipped for mass deployment throughout any sized corporate, university, medical, military, or government facility.

Easy Provisioning and Device Management

The XiO Cloud service is an IoT cloud-based provisioning service (available separately) that enables installers and IT managers to easily deploy and manage thousands of devices. The XiO Cloud service provides system alerts, network management and provisioning, and the pairing of a control device to the system's UC Engine. System updates are controlled by Windows® software update.

Visit www.crestron.com/xiocloud for additional information.



Crestron Flex Small Room Conference System with Jabra® PanaCast® 50 Video Bar and Wall Mounted Control Interface for Microsoft Teams® Rooms, India

Premium-Level Support

Crestron Flex Care is an optional subscription service that automatically renews annually, providing 24/7 live remote technical support, an extended five year warranty on Crestron® branded hardware, expedited advance replacements, and a discounted rate for on-site support.

Visit www.crestron.com/flexcare for detailed terms and conditions and additional information.

Dual Control Option

A TS- or TSW-70 series 10.1 in. touch screen may be added to the solution as an additional control point for the Microsoft Teams Rooms environment.^{2, 3}

Deployment Resources

View the Crestron Flex Pre-Deployment Checklist to help plan your Crestron Flex installation.

Specifications

Included Components

TSW-1070-B-S-T-V 10.1 in. (257 mm) wall mount

touch screen, black

UC-BRKT-200-S-T-ASSY UC Bracket Assembly comprised of:

UC Engine: Mini PC with Microsoft Teams video

ADPT-USB-ENET: USB-to-Ethernet Adapter

HDMI® to USB 3.0 converter for content ingest

Mounting hardware

UC-SB-P50-INDIA Jabra PanaCast 50 video bar for Crestron Flex systems

Wall Mount Touch Screen

Touch Screen 10.1 in. (257 mm) diagonal capacitive multi-

touch TFT active matrix color LCD, 1920 x

1200 pixels

UI Microsoft Teams UI plus optional Crestron

Smart Graphics® room control UI²

Ethernet 100/1000 Mbps, auto switching, auto

negotiating, auto discovery, full/half duplex, TCP/IP, UDP/IP, CIP, DHCP, SSL, TLS, SSH, SFTP (SSH File Transfer Protocol), IEEE 802.1X, SNMP, IPv4 or IPv6, Active Directory® service authentication, HTTPS web browser setup, XiO Cloud® client, IEEE 802.3at

compliant

Power over IEEE 802.3at Type 2 compliant PoE+ PD

Ethernet (Powered Device);

> Normally requests 15 W from an 802.3at Type 2 PSE with LLDP advanced power

management;

With room scheduling and USB enabled, requests 18 W from an 802.3at Type 2 PSE

Requests 30 W (PoE+ Class 4) from an 802.3at Type 2 PSE without LLDP; Requests 15.4 W (PoE Class 0) from an 802.3af (or 802.3at Type 1) PSE

A PoE injector is included to power the touch PoE Injector screen if network PoE is not available

Plastic, smooth black finish, edge-to-edge Construction

glass with black surround

Height: 5.87 in. (149 mm) **Dimensions**

Width: 9.46 in. (240 mm) Depth: 2.01 in. (51 mm)

Dimensions do not include mounting bracket

or add-on accessories

1.61 lb (730 g) Weight

Jabra PanaCast 50 Video Bar for Crestron Flex **Systems**

Speakers (4) speakers, stereo;

2 in. (50 mm) woofers;

2 x 3/4 in. (50 x 20 mm) tweeters; 80 Hz to 20 kHz frequency response;

Automatic speaker detection

Microphone (8) microphone beamforming array;

-37 dBFS microphone sensitivity;

100 Hz to 8 kHz microphone frequency range;

Suitable for rooms up to 15×15 ft

 $(4.5 \times 4.5 \text{ m})$

NOTE: Microphone pickup range may vary in rooms with highly reflective infrastructure (e.g., glass walls, metal furniture, open ceilings, etc.) or above average ambient noise.

(3) cameras; Camera 13 Megapixels Optics



Crestron Flex Small Room Conference System with Jabra® PanaCast® 50 Video Bar and Wall Mounted Control Interface for Microsoft Teams® Rooms, India

Camera Field 180° horizontal, 54° vertical

of View

Autozoom Automatic digital zoom dynamically frames

people within 11 ft (3.5 m)

Camera 3840 x 1080 @ 30 fps

Resolution

Power From external power pack;

Input: 100-240VAC, 50/60 Hz;

Output: 5A @ 12V

Enclosure Black speaker and camera housing, rear air

vents, integrated adjustable mounting

bracket

Mounting Wall mount using integrated mounting

bracket;

Optional table mount or VESA® compliant

screen mount (both sold separately)

Dimensions Height: 3.1 in. (90 mm)

Width: 25.60 in. (650 mm) Depth: 4.90 in. (125 mm)

Weight 4.85 lb (2.2 kg)

For more information on the Jabra PanaCast 50 video bar for Crestron Flex systems, refer to jabra.com/panacast50.

UC Bracket Assembly

UC Engine Mini PC, Intel Core® processor with

Windows® 10 IoT Edition OS and 100/1000

Mbps Ethernet connectivity

UC Client Microsoft Teams Rooms

Management Client

gement XiO Cloud Service

Content Ingest HDMI input via HDMI to USB 3.0 converter

Display Output Single or dual display support¹

Display Output 1080p

Resolution

Power

100-240VAC, 50/60 Hz adapter (included)

Construction Metal mounting bracket, black,

preassembled with UC Engine and HDMI to

USB 3.0 converter

Mounting Surface wall mount behind the display

device, or attach to the rear of the display device via the bolts attaching the display to

a VESA® compliant display mount;

Bracket includes mounting holes on both side edges, spaced 100, 200, and 300 mm vertically, to allow for attachment to either

side of the display mounting plate

Dimensions Height: 15.00 in. (381 mm)

Width: 14.50 in. (368 mm)

Depth: 1.87 in. (48 mm) (UC Bracket Assembly with HD-CONV-USB-200)

1.93 in. (49 mm) (UC Bracket Assembly with

HD-CONV-USB-300)

Weight 7.7 lb (3.5 kg) (UC Bracket Assembly with

HD-CONV-USB-200)

7.95 lb (3.6 kg) (UC Bracket Assembly with

HD-CONV-USB-300)

Model

UC-B31-T-WM-INDIA

Crestron Flex Small Room Conference System with Jabra® PanaCast® 50 Video Bar and Wall Mounted Control Interface for Microsoft Teams® Rooms, India

Available Accessories

For a list of available accessories, visit the <u>UC-B31-T-WM-INDIA</u> product page.

Notes:

- Display must support "Wake on Sync" and "Sleep on No Sync" functionality. Consult the display manufacturer's specifications or internal settings of the specific display.
- Room control capability (lighting, shades, thermostats, etc.) requires
 additional equipment and commissioning to be provided by a Crestron
 authorized integrator and/or programmer. Additional costs may apply.
- A maximum of two touch screens or one touch screen and one Crestron
 Mercury device can be accommodated by the system. Only one control
 device may be connected via direct connection method.



Crestron Electronics Inc.

Crestron Flex Small Room Conference System with Jabra® PanaCast® 50 Video Bar and Wall Mounted Control Interface for Microsoft Teams® Rooms, India

This product may be purchased from select authorized Crestron dealers and distributors. To find a dealer or distributor, please contact the Crestron sales representative for your area. A list of sales representatives is available online at www.crestron.com/How-To-Buy/Find-a-Representative or contact us for additional information by visiting https://www.crestron.com/contact/our-locations for your local contact.

This product is covered under the Crestron standard limited warranty. Refer to www.crestron.com/warranty for full details.

The specific patents that cover Crestron products are listed online at <u>patents.crestron.com</u>.

Certain Crestron products contain open source software. For specific information, please visit www.crestron.com/opensource.

Crestron, the Crestron logo, Smart Graphics, and XiO Cloud are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. Jabra and PanaCast are trademarks of GN Audio A/S in the United States and/or other countries. HDMI is either a trademark or registered trademark of HDMI Licensing LLC in the United States and/or other countries. Intel Core is either a trademark or registered trademark of Intel Corporation in the United States and/or other countries. Active Directory, Microsoft Teams, and Windows are either trademarks or registered trademarks of Microsoft Corporation in the United States and/or other countries. VESA is either a trademark or registered trademark of Video Electronics Standards Association in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography.

Specifications are subject to change without notice.


©2023 Crestron Electronics, Inc.

Rev 08/18/23




Crestron Flex Small Room Conference System with Jabra® PanaCast® 50 Video Bar and Wall Mounted Control Interface for Microsoft Teams® Rooms, India

Touch Screen (TSW-1070-B-S)

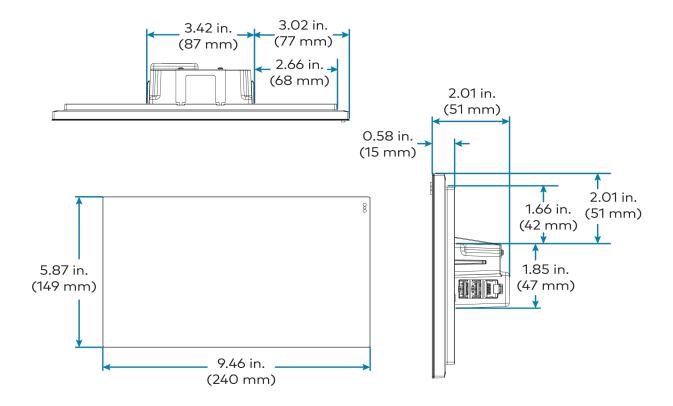


Crestron Flex Small Room Conference System with Jabra® PanaCast® 50 Video Bar and Wall Mounted Control Interface for Microsoft Teams® Rooms, India

TSW-1070 Mounting Bracket

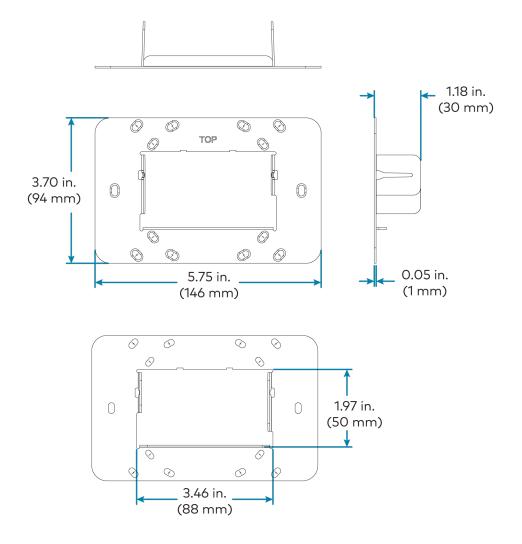

Crestron Flex Small Room Conference System with Jabra® PanaCast® 50 Video Bar and Wall Mounted Control Interface for Microsoft Teams® Rooms, India

UC Bracket Assembly with HD-CONV-USB-200

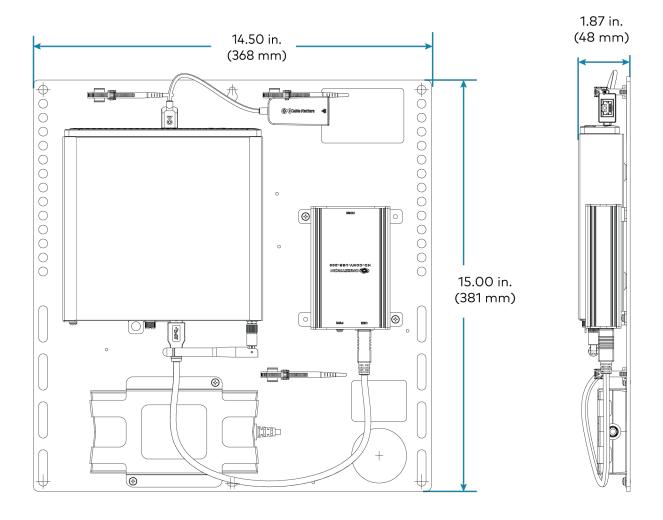

Crestron Flex Small Room Conference System with Jabra® PanaCast® 50 Video Bar and Wall Mounted Control Interface for Microsoft Teams® Rooms, India

UC Bracket Assembly with HD-CONV-USB-300

