

CLW-SWEX-230-E

Cameo[®] Express Wireless In-Wall Switch, 230V

- > Field replaceable and engravable buttons
- > Available in black, white, or almond
- > infiNET EX[®] robust communication
- > Models popular Cameo[®] style
- > Configurable with rocker or two buttons
- > Matching aesthetics across entire line

The CLW-SWEX-230-E is a Cameo[®] Express wireless in-wall switch which features field-replaceable and engravable buttons. Configurable with two buttons or in a rocker layout, the CLW-SWEX-230-E is more versatile than previous generations of in-wall switches. Even more affordable than [Cameo dimmers and switches](#), the Cameo Express line makes it possible to bring controlled lighting to every room in the home or office. Its streamlined design complements the entire line of Cameo dimmers, switches and keypads, making it a great addition to new or retrofit installations. In addition to its attractive look and feel, infiNET EX[®] communication technology brings proven reliability to the CLW-SWEX-230-E.

Field-Replaceable Button Faces

Like their cousin Cameo keypads, the buttons on the CLW-SWEX-230-E can be swapped in the field, making it easy to change engraving or color after installation. The rocker controller brings a familiar user interface to the Crestron[®] in-wall switch, while the two-button layout offers clear on/off control.

Custom Programmable Keypad

Because the CLW-SWEX-230-E is attached to the Crestron network, it can also function as a keypad, sending commands to trigger whole-room or house lighting scenes, or any other function. The two-button layout takes advantage of prime single-gang wall box real estate; use buttons to control in-room audio or lamps. Press-and-hold and double-tap functionality allows buttons to be used for more than just one function.

infiNET EX Communications

Ultra-reliable infiNET EX wireless technology provides steadfast two-way RF communications throughout a residential or commercial structure without the need for physical control wiring. Employing a 2.4 GHz mesh network topology, each infiNET EX device functions as an expander, passing command signals through to every other infiNET EX device within range (approximately 150 feet or 46 meters indoors), ensuring that every command reaches its intended destination without disruption^[1].

The CLW-SWEX-230-E communicates with a Crestron control system via an infiNET EX Wireless Gateway (model CEN-RFGW-EX, DIN-AP3MEX, or



MC3^[2]). Up to 100 infiNET EX devices may coexist on a single wireless network, and every device that is added to the network effectively increases the range and stability of the entire network by providing multiple redundant signal paths^[1]. Built-in Dynamic Frequency Allocation continuously monitors RF conditions, automatically selecting the clearest channel to prevent interference from neighboring networks, cordless phones, and microwaves.

SPECIFICATIONS

Load Ratings

Load Types: Incandescent, Magnetic Low Voltage, Electronic Low Voltage, and Fluorescent Ballast

Minimum Load: 10 W

Maximum Load: 1200 W/VA

Power Requirements


230 Volts AC, 50/60Hz, line power

Controls

Rocker switch or two-button configuration

LED Indicator

Feedback: (1) Green LED

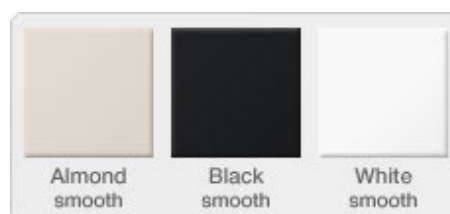

Due to differences in monitors, actual colors may vary from colors as they appear onscreen.

CLW-SWEX-230-E Cameo® Express Wireless In-Wall Switch, 230V

Wireless

RF Transceiver: infiNET EX® 2-way RF, 2.4 GHz ISM Channels 11-26 (2400 to 2483.5 MHz), default channel 15; IEEE 802.15.4 compliant

Range (typical): 150 ft (46 m) indoor, 250 ft (76 m) outdoor to nearest mesh network device(s); subject to site-specific conditions and individual device capabilities^[1]

Gateway: Requires an infiNET EX gateway^[2]

Connections

Line: Brown wire, 1.5 mm² (16 AWG)

Neutral: Blue wire, 1.5 mm² (16 AWG)

Load: Red wire, 1.5 mm² (16 AWG)

Ground: Green/Yellow wire, 1.5 mm² (16 AWG)

Environmental

Temperature: 32° to 104°F (0° to 40°C)

Humidity: 10% to 90% RH (non-condensing)

Enclosure

1-gang mountable in a 3-1/2 inch deep electrical box;

Requires decorator style faceplate (not included)

Dimensions

Height: 4.13 in (105 mm)

Width: 1.75 in (45 mm)

Depth: 1.75 in (45 mm)

Weight

5 oz (142 g)

MODELS

Available Models

CLW-SWEX-230-E-A-S: Cameo® Express Wireless In-Wall Switch, 230V, Almond Smooth

CLW-SWEX-230-E-B-S: Cameo® Express Wireless In-Wall Switch, 230V, Black Smooth

CLW-SWEX-230-E-W-S: Cameo® Express Wireless In-Wall Switch, 230V, White Smooth

Notes:

1. Any infiNET EX device that provides expander functionality will effectively extend the range of the wireless network beyond the initial range of the gateway. Battery-powered infiNET EX devices do not provide expander functionality. A dedicated infiNET EX Wireless Expander, model CLW-EXPEX or GLA-EXPEX, is also available.
2. Item(s) sold separately.

This product may be purchased from an authorized Crestron dealer. To find a dealer, please contact the Crestron sales representative for your area. A list of sales representatives is available online at www.crestron.com/salesreps or by calling 800-237-2041.

The specific patents that cover Crestron products are listed online at: patents.crestron.com.

Crestron, the Crestron logo, Cameo, and infiNET EX are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography. Specifications are subject to change without notice. ©2014 Crestron Electronics, Inc.

CLW-SWEX-230-E Cameo® Express Wireless In-Wall Switch, 230V

CAD DRAWING

