

Room Media Controller: QM-RMC

Purpose

The purpose of this addendum is to provide additional information not supplied with the original QM-RMC Operations Guide (Doc. 6161). Specifically, this addendum corrects the procedure for establishing the serial console connection with Viewport using the SW-R button. This procedure appeared on page 11.


Correction to “Establishing Communication with the QM-RMC”

NOTE: Changes to the existing text are in **bold** as follows. The notes and image following the text are new.

Serial console connection may be established only if SW-R button is pressed **and held about 5 to 7 seconds** during power up (**wait for Viewport to display some information**), or if pressed and held at the same time HW-R is momentarily pressed.

NOTE: The COM B LED will flash when in the console mode.

Example of Viewport Message – No Program Loaded

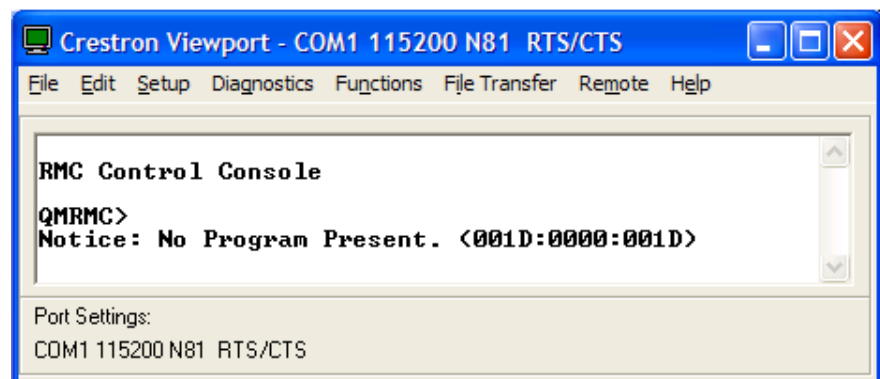

To terminate the console mode, press the HW-R button or cycle the power.

NOTE: Pressing **F10** (Program Reset) in Viewport may cause errors if both the program and the console mode are using the same COM port



Crestron Electronics, Inc.
15 Volvo Drive Rockleigh, NJ 07647
Tel: 888.CRESTRON
Fax: 201.767.7576
www.crestron.com

**Addendum #1 for DOC. 6161
09.03**

Specifications subject to
change without notice.