
MD5-502

SCALE: | 1 |/2" = 1'-0" | DATE: | 10.14.15 | REV.:

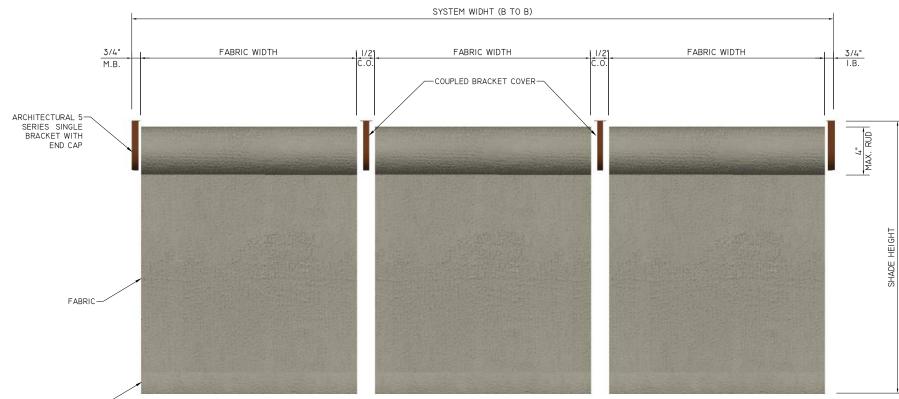

## NOTES:

HEM BAR-

- I. ACTUAL MAXIMUM SHADE SIZE IS DEPENDENT UPON THE FABRIC CHOSEN.
- 2. SHADE WIDTH NOT INCLUDED END CAP AT BOTH END.
- ALL EXTRUSIONS (FASCIA, CLOSURE PLATE, TOP/BACK COVER, ETC.) FOR SHADES INDICATED AS "OUTSIDE MOUNT", 3/16" HAS BEEN DEDUCTED FROM THE WIDTH OF THE EXTRUSION TO ALLOW FOR ENDCAPS. PLEASE VERIFY MESUREMENTS.
- 4. WIDTH TO HEIGHT RATIO WHICH EXCEEDS I:4 A STABILIZING BATTEN WILL ASSIST IN REDUCING FABRIC CURLING ON THE SIDES OF THE SHADE. THE DEFAULT BATTEN PLACEMENT IS AT I/2 WAY POINT OF THE SHADE HEIGHT.

MINIMUM LIGHT GAP			в то в		MAX. MOTOR
MOTOR	TUBE	DEDUCTION	MIN.	MAX.	CAPACITY
CSM-QMTDC-250 CN	2.5" Spline SEE DWG.		TBD	4 Nm	
CSM-QMTDC-250 EX		SEE DWG.	PER BAND	טפו	4 MIII