

SPKA-NCTP

Speaker Templates, Metal Installation Guide



Description

Crestron® SPKA-NCTP New-Construction Speaker Templates are designed to be attached to framing prior to the installation of drywall in preparation for the installation of Crestron Saros® in-ceiling speakers. They allow for versatile positioning over ceiling joists spaced 16" to 24" on center. Models are available to fit all sizes of Saros in-ceiling speakers.

The SPKA-NCTP-IC410, -IC1410, -IC610, -IC1610, and -IC810 templates are flat and intended for installations where drywall installs over the template, and the template acts as a guide for cutting the hole in the drywall.

The SPKA-NCTP-IC411, -IC611, and -IC811 templates include a collar and are intended for installations where drywall with a pre-cut hole is installed over the template, and the installer applies plaster flush to the edge of the collar for a clean appearance.

Additional Resources



Visit the product page on the Crestron website (www.crestron.com) for additional information and the latest firmware updates. Use a QR reader application on your mobile device to scan the QR image.




Installation

Refer to the following illustrations and do the following:

1. Position the template in the desired location between the ceiling studs.
2. Nail the template in place using appropriate hardware. Be sure the nail heads are set as flush as possible.

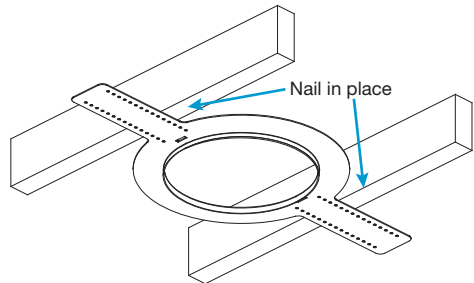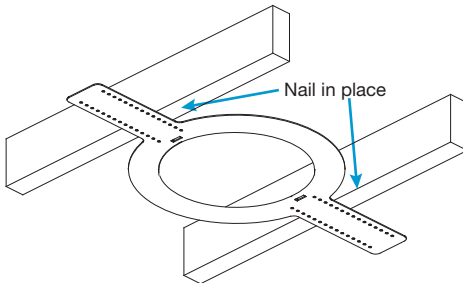

Dimensions

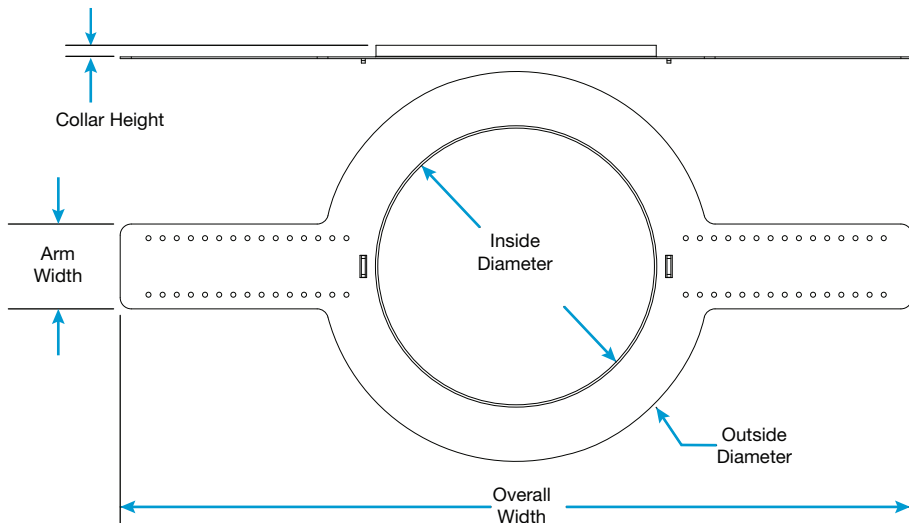

	IC410/411	IC1410	IC610/611	IC1610	IC810/811
Outside Diameter	11.74 in (298 mm)	10.79 in (274 mm)	13.79 in (350 mm)	12.80 in (325 mm)	15.28 in (388 mm)
Arm Width	3.00 in (76 mm)	3.00 in (76 mm)	3.00 in (76 mm)	3.00 in (76 mm)	3.00 in (76 mm)
Overall Width	28.00 (711 mm)	28.00 (711 mm)	28.00 (711 mm)	28.00 (711 mm)	28.00 (711 mm)

	IC410	IC1410	IC610	IC1610	IC810
Inside Diameter	7.91 in (201 mm)	6.85 in (174 mm)	9.95 in (253 mm)	8.86 in (225 mm)	11.45 in (291 mm)

	IC411	IC611	IC811
Inside Diameter	7.74 in (197 mm)	9.79 in (249 mm)	11.28 in (287 mm)
Collar Height	0.41 in (10 mm)	0.41 in (10 mm)	0.41 in (10 mm)

The product warranty can be found at www.crestron.com/warranty.

The specific patents that cover Crestron products are listed at patents.crestron.com.

Certain Crestron products contain open source software. For specific information, please visit www.crestron.com/opensource.

Crestron, the Crestron logo, and Saros are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography.

This document was written by the Technical Publications department at Crestron.

©2016 Crestron Electronics, Inc.

Crestron Electronics, Inc.

15 Volvo Drive
Rockleigh, NJ 07647
Tel: 888.CRESTRON
Fax: 201.767.7576
www.crestron.com

Installation Guide
DOC. 7540C
(2036747)
11.16

Specifications subject to change without notice.