
Workplace Technology Solution - Large Meeting Room

The Crestron® CE-2000 Large Meeting Room workplace technology solution provides all of the hardware required to build a conferencing solution.



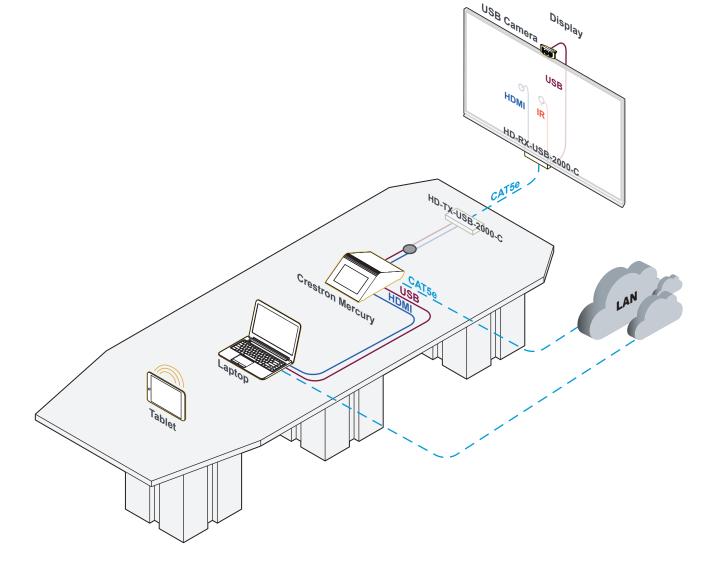

Preparation

Verify Contents

Check the table below for the system's package contents before starting installation. The following items are

PRODUCT NAME	DESCRIPTION	QUANTITY	PART NUMBER
CBL-CAT5E-P-50	Ethernet LAN Cable, Plenum, 50 feet (15.24 m)	1	6504169
CBL-HD-6	HDMI [®] Interface Cable, 6 feet (1.83 m)	1	6503565
CBL-HD-20	HDMI Interface Cable, 20 feet (6.10 m)	1	6503567
CBL-HD-THIN-HS-6	HDMI Interface Cable, Thin, Type A Male-to-Male, 6 feet (1.83 m)	1	6508218
CBL-USB-A-BMICRO-6	USB Cable, Type A Male to Micro-B Male, 6 feet (1.83 m)	1	6508229
CBL-USB-A-EXT-15	USB Extension Cable, Type A Male-to- Female, 15 feet (4.57 m)	1	6508260
CCS-CAM-USB-F-100	Logitech® Webcam C930e	1	6506442
CCS-UC-1-AV	Crestron Mercury® Tabletop Conference System, Video Package	1	6508083
HD-RX-USB-2000-C	4K HDMI & USB over HDBaseT® Receiver 2000	1	6508475
HD-TX-USB-2000-C	4K HDMI & USB over HDBaseT Transmitter 2000	1	6508474
PW-2420RU	Power Pack	1	6500187
STIRP	IR Emitter Probe w/3.5 mm Mini Phone Plug	1	6500940

Additional Requirements

The following items are also required to build a large meeting room solution.

- A video display (not included) must be connected to the HD-RX-USB-2000-C
- A source device (sold separately) may be connected to the CCS-UC-1

Optional Items

888.273.7876

The following items can be added to the large meeting room solution.

- CBL-MULTI-HD-6 Multihead HD video cable, 6 ft (1.8 m) (sold separately)
- CCS-UCA-SMK Swivel mount kit (sold separately)

201.767.3400




change without notice.

Workplace Technology Solution - Large Meeting Room

Connect the System

HD-EXT-USB-2000-C

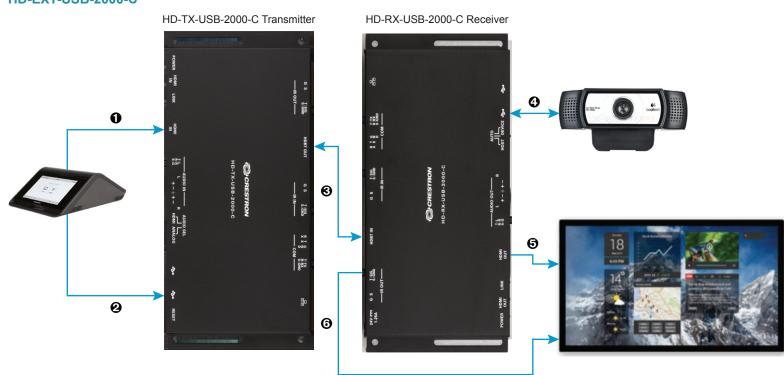

The HD-EXT-USB-2000-C consists of two components: the HD-TX-USB-2000-C transmitter and the HD-RX-USB-2000-C receiver.

- Connect the CBL-HD-20 cable to the HDMI OUT port on the CCS-UC-1 and to the HDMI IN port on the HD-TX-USB-2000-C.
- @ Connect the CBL-USB-A-BMICRO-6 cable to the USB/CAM port on the CCS-UC-1 and to the USB B port on the HD-TX-USB-2000-C. Use the CBL-USB-A-EXT-15 cable to extend the length of the USB cable run if necessary.
- © Connect the CBL-CAT5E-50-P cable to the HDBT OUT port on the HD-TX-USB-2000-C and to the HDBT IN port on the HD-RX-USB-2000-C.
- Oconnect the Logitech C930E webcam's USB cable to the USB A port on the HD-RX-USB-2000-C.
- **⑤** Connect the CBL-HD-6 cable to the HDMI OUT port on the HD-RX-USB-2000 and to the HDMI IN port on the display device.
- © Connect the STIRP to the IR port on the HD-RX-200-C and mount it to the display device as described in the STIRP Installation Guide (Doc. 5674) at www.crestron.com/manuals.

Apply Power

When all connections are made, apply power to all of the devices in the system.

The product warranty can be found at www.crestron.com/legal/sales-terms-conditions-warranties. The specific patents that cover Crestron products are listed at www.crestron.com/legal/patents.

Certain Crestron products contain open source software. For specific information, please visit www.crestron.com/legal/open-source-software

Crestron, the Crestron logo, AirMedia, and Crestron Mercury are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries

HDBaseT is either a trademark or registered trademark of the HDBaseT Alliance in the United States and/or other countries. HDMI is either a trademark or a registered trademark of HDMI Licensing LLC in the United States and/or other countries. Logitech is either a trademark or registered trademark of Logitech in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others

Crestron is not responsible for errors in typography or photography

CCS-UC-1 USB/ACC: CBL-MULTI-HD-6 Multihead HD video cable (sold separately) AUX: 10BASE-T/100BASE-TX Ethernet CCS-UCA-MIC Microphone pods to SIP or AirMedia® router (sold separately) Must connect AC power pack to CCS-UC-1

Make the following additional connections to the CCS-UC-1:

- Connect the CBL-HD-THIN-HS-6 cable to the HDMI IN port and route it to the front of the CCS-UC-1 for a connection to a portable computer (not included) as described in the CCS-UC-1 DO Guide (Doc. 7843) at www.crestron.com/manuals.
- 2 Connect the USB 2.0, A-to-Micro B cable (included with the CCS-UC-1) to the USB B port and route it to the front of the CCS-UC-1 for a connection to a portable computer (not included) as described in the CCS-UC-1 DO Guide (Doc. 7843).
- Ocnnect the CCS-UC-1 to an earth ground.
- Ocnnect the CAT5e cable (included with the CCS-UC-1) from the corporate LAN to the LAN port.
- **⑤** (Optional) Connect the PW-2420RU power pack to the 24V 2.5A port (only required if using the optional CCS-UCA-MIC microphone pods and/or if the CCS-UC-1 is not powered using PoE+.)



201.767.3400

More Information

For more information, refer to the CCS-UC-1 DO Guide (Doc. 7843) and the CCS-UC-1 Supplemental Guide (Doc. 7844) at www.crestron.com/manuals.

> This document was written by the Technical Publications department at Crestron. ©2018 Crestron Electronics Inc.



change without notice