


# SmartPresenter™ Cable: SPC-124

The SPC-124 is designed for the SmartPresenter™ and used to control specific serially-controlled devices. The entire length of the cable is approximately 15 feet (4.572 meters) with a RJ11 (6-position, 6-pin) connector at one end and a DB9F connector at the other end.

### Physical View of the SPC-124

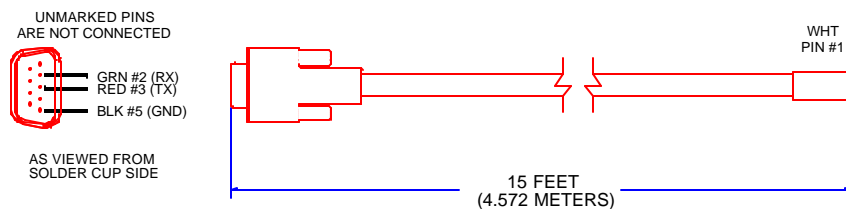

*NOTE: Alteration of the SPC-124 in any manner may affect its performance within the control system. Crestron cannot guarantee its behavior if altered.*

A serially-controlled device can be controlled with the SmartPresenter™ only if the appropriate Q-Code is assigned to OUTPUT 4 on the SP-1. The SP-1 recognizes the Q-Code as an RS-232 switching device and outputs commands for that device to the PC port (rather than the OUTPUT 4 port). Use the SPC-124 to connect the SP-1 to the serially-controlled device (refer to illustration below). Only those devices with a cable code “d” designation in the Crestron Q-Codes table (latest version of the SmartPresenter Quick Guide, Doc. 5742) require the SPC-124.

### Hookup Connection for Controlling a Serially-Controlled Device

