


The Crestron® EDU-2000 Flexible Single Display Classroom technology solution provides all of the hardware required to build a single display classroom presentation system.

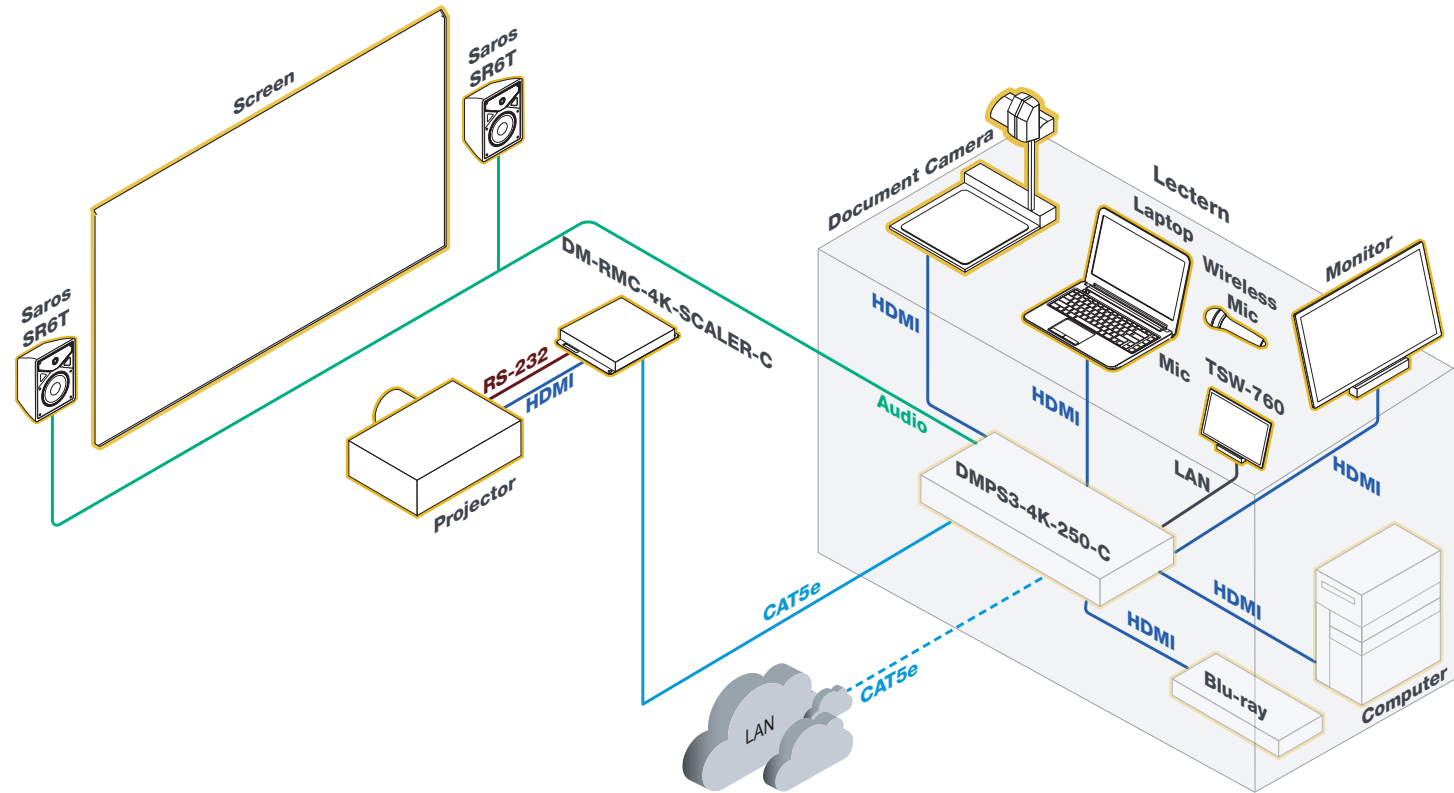

1 Preparation

Verify Contents

Check the table below for the system's package contents before starting installation. The following items are included:


QUANTITY	ITEM	PART NUMBER
2	CBL-CAT5E-7, 7' CAT5e Patch Cable	6509924
1	CBL-CAT5E-P-50, 50' CAT5e Cable	6504169
5	CBL-HD-6, 6' HDMI® Cable	6503565
1	CBL-HD-20, 20' HDMI Cable	6503567
1	CBL-SERIAL-DB9-L-12, 12' Serial Cable, DB9F to Flying Leads	6510198
2	CBL-SPK-P-50, 50' Speaker Cable, Plenum	6510086
1	DMPS3-4K-250-C-AIRMEDIA, 3-Series® 4K DigitalMedia™ Presentation System 250 with AirMedia® Technology	6509876
1	DM-RMC-4K-SCALER-C, 4K DigitalMedia 8G+® Receiver & Room Controller with Scaler	6506937
1	PW-4830DUS, 150W PoDM Power Pack for DM 8G+® I/O Blades & DMPS3-4K-200/300-C	6507064
2	SAROS SR6T-W-T-EACH+, Saros® 6.5" 2-Way Surface Mount Indoor/Outdoor Speaker, White Textured, Single	6504626
1	TSW-760-B-S, 7" Touch Screen, Black Smooth	6507649
1	TSW-760-TTK-B-S, Tabletop Kit for TSW-760, Black Smooth	6507727

Additional Requirements

- A display device (not included) must be connected to the HDMI OUT and COM ports on the DM-RMC-4K-SCALER-C.
- Source devices (not included) may be connected to the HDMI IN ports on the DMPS3-4K-250-C-AIRMEDIA.
- A wireless microphone system (not included) may be connected to the MC ports on the DMPS3-4K-250-C-AIRMEDIA.
- A monitor (not included) may be connected to the HDMI OUTPUT port on the DMPS3-4K-250-C-AIRMEDIA.


2 Connect the System

DMPS3-4K-250-C-AIRMEDIA (Rear View)

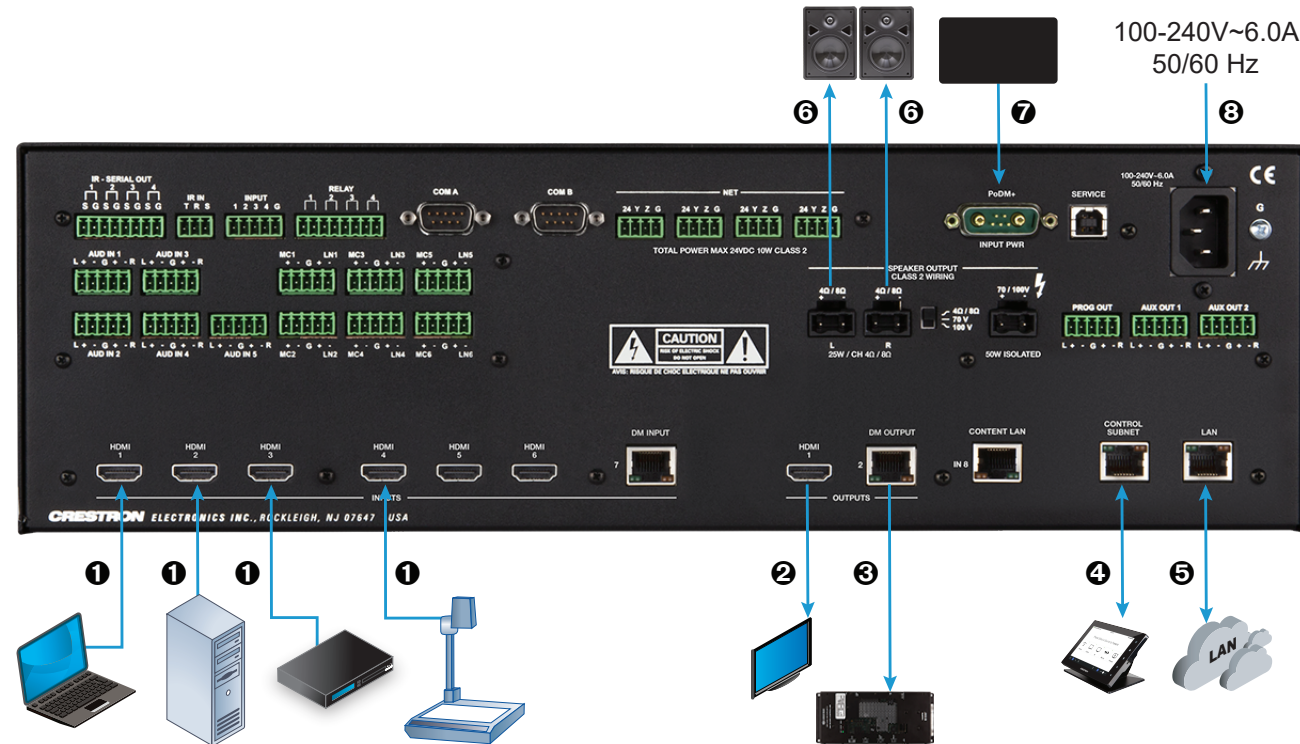

- 1 Connect source devices (not included) to the HDMI IN ports with the CBL-HD-6 cables.
- 2 Connect a monitor (not included) to the HDMI OUTPUT port with the CBL-HD-6 cable.
- 3 Connect the DM OUT port to the DM IN port on the DM-RMC-4K-SCALER-C with the CBL-CAT5E-P-50 cable.
- 4 Connect the TSW-760-B-S to the CONTROL SUBNET port with the CBL-CAT5E-7 cable.
- 5 Connect the LAN to the LAN port with the CBL-CAT5E-7 cable.
- 6 Connect the Saros speakers to the 4Ω/8Ω ports with the CBL-SPK-P-50 cables.
- 7 Connect the PW-4830DUS to the PoDM+ port.
- 8 Connect the power cord included with the DMPS3-4K-250-C-AIRMEDIA to an ac power outlet.

DM-RMC-4K-SCALER-C

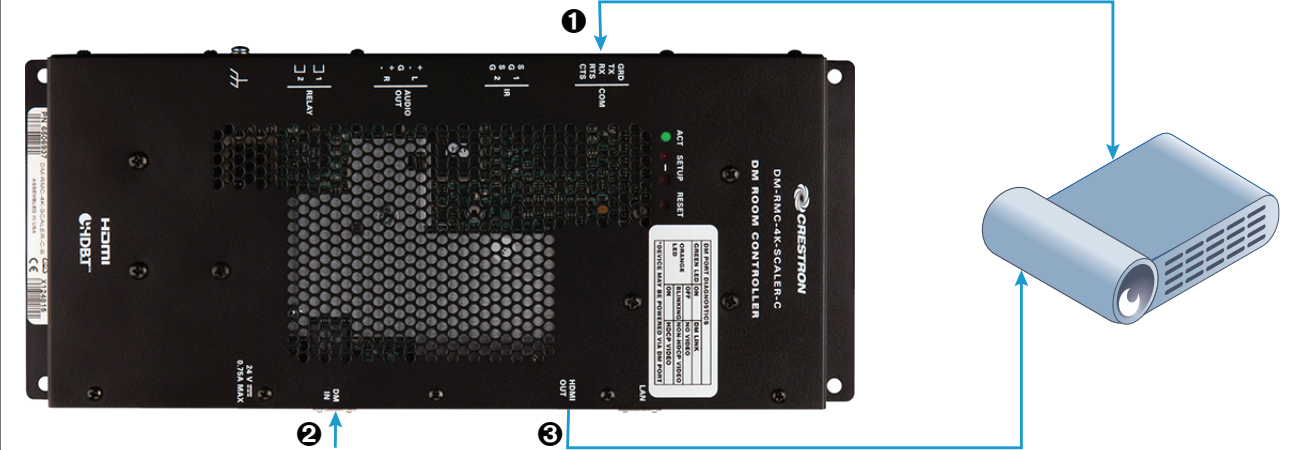

- 1 Connect the COM port to the RS-232 port on the display device (not included) with the CBL-SERIAL-DB9-L-12 cable.
- 2 Connect the DM IN port to the DM OUT port on the DMPS3-4K-250-C-AIRMEDIA with the CBL-CAT5E-P-50 cable.
- 3 Connect the HDMI OUT port to the display device with the CBL-HD-20 cable.

3 Apply Power

When all connections are made, apply power to all of the devices in the system.

4 More Information

For more information, refer to the documents below. All documents can be found at www.crestron.com/manuals.

- DMPS3-4K-250-C-AIRMEDIA DO Guide (Doc. 8215)
- DMPS3-4K-250-C-AIRMEDIA Supplemental Guide (Doc. 7849)
- DM-RMC-4K-SCALER-C DO Guide (Doc. 7708)
- DM-RMC-4K-SCALER-C Supplemental Guide (Doc. 7728)
- TSW-760 DO Guide (Doc. 7926)
- TSW-760 Supplemental Guide (Doc. 7927)
- TSW-760-TTK DO Guide (Doc. 7928)

The product warranty can be found at www.crestron.com/legal/sales-terms-conditions-warranties.

The specific patents that cover Crestron products are listed at www.crestron.com/legal/patents.

Certain Crestron products contain open source software. For specific information, please visit www.crestron.com/legal/open-source-software.

Crestron, the Crestron logo, AirMedia, 3-Series, DigitalMedia, DigitalMedia 8G+, DM 8G+, and Saros are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. Blu-ray is either a trademark or registered trademark of the Blu-ray Disc Association in the United States and/or other countries. The HDBaseT Alliance logo is either a trademark or registered trademark of the HDBaseT Alliance in the United States and/or other countries. HDMI and the HDMI logo are either trademarks or registered trademarks of HDMI Licensing LLC in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography.

This document was written by the Technical Publications department at Crestron.

©2018 Crestron Electronics, Inc.