FT2A-PWR-US-1-BASIC

AC Power Outlet Module for FT2 Series, Single, US NEMA 5, Type B, Attached Power Cord

> *Adds one AC power outlet to an FT2 Series FlipTop™*

> *Outlet sits nearly flush at the top of the FlipTop for easy access*

> *Provides a single NEMA 5 type receptacle*

> *Connects to the AC power source via an 8 ft (2.44 m) long power cord with grounded plug*

> *Suitable for use in the U.S., Canada, Mexico, and other locales*

> *Rated 10 Amps at 125 Volts AC, 50/60 Hz*

> *UL® Listed for US and Canada*

> *Simple drop-in modular design*

> *Occupies two module slots within the FlipTop*

The Crestron® FT2A-PWR-US-1-BASIC AC Power Outlet Module is designed for installation within a Crestron FT2 Series FlipTop™ to provide a single NEMA 5 type receptacle above the table. It occupies two module slots within the FlipTop, and is suitable for use in the United States, Canada, Mexico, and other countries or regions where NEMA type power outlets are used (Commerce Department Plug Type B).

The FT2A-PWR-US-1-BASIC is rated for 10 Amps at 125 Volts AC, 50/60 Hz and is UL® Listed. An 8 foot (2.44 meter) long cord with grounded plug is attached at the bottom of the module for connection to an AC power source below the table.

SPECIFICATIONS

Power Rating

10 Amps @ 125 Volts AC, 50/60 Hz

Receptacles & Plugs

Outlets Above Table: (1) NEMA 5-15R grounded AC power receptacle, Commerce Dept. Type B
Outlets Below Table: None
Main Power Plug: (1) 8 foot (2.44 meter) attached cable with NEMA 5-15P grounded AC power plug

Environmental

Temperature: 32° to 113° F (0° to 45° C)
Humidity: 10% to 90% RH (non-condensing)

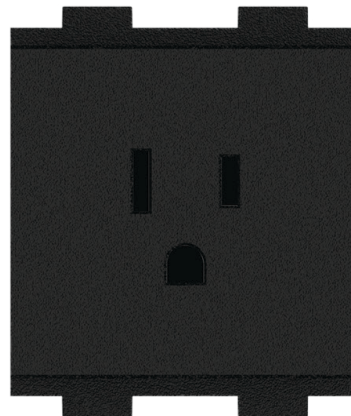### Construction

Composition: Precision fit plastic drop-in module, black, includes attached cable beneath the table
Mounting: Requires two consecutive module slots within the FlipTop chassis

Compliance

UL Listed for US & Canada

Available Models

FT2A-PWR-US-1-BASIC: AC Power Outlet Module for FT2 Series, Single, US NEMA 5, Type B, Attached Power Cord

Notes:

This product may be purchased from an authorized Crestron dealer. To find a dealer, please contact the Crestron sales representative for your area. A list of sales representatives is available online at https://www.crestron.com/How-To-Buy/Find-a-Representative or by calling 855-263-8754.

The specific patents that cover this and other Crestron products are listed online at https://www.crestron.com/legal/patents.

Certain Crestron products contain open source software. For specific information, please visit https://www.crestron.com/opensource.

CRESTRON®

1.98 in
50 mm

2.32 in
59 mm

1.84 in
47 mm

3.13 in
80 mm

4.61 in
118 mm

8.0 ft
2.44 m